

<https://www.energy-transition-institute.com/documents/17779499/17781876/Hydrogen+Based+Energy+Conversion+Presentation.pdf/f195f54c-ba84-e975-5ed6-0ac3c2062592?t=1554448139627>

More than storage: system flexibility - Presentation

# Hydrogen-based energy conversion

A.T. Kearney Energy Transition Institute  
February 2014

# Compiled by the A.T. Kearney Energy Transition Institute

## Acknowledgements

A.T. Kearney Energy Transition Institute wishes to acknowledge for their review of this FactBook: Amgad Elgowainy, principal energy systems analyst at Argonne National Laboratory; Marcel Weeda, manager hydrogen transitions and infrastructure at Energy Research Center of the Netherlands; Alexander Körner, lead author of the Hydrogen Technology Roadmap of the International Energy Agency (IEA). Their review does not imply that they endorse this FactBook or agree with any specific statements herein. The Energy Transition Institute expresses its gratitude to Kamel Bennaceur, former Board Member of the Institute, for his guidance and support throughout the study, and also gratefully acknowledges individuals, companies, research centers and industry associations interviewed during the preparatory phase of the study. Finally, the Institute also wishes to thank the authors of this FactBook for their contribution: Benoît Decourt, Bruno Lajoie, Romain Debarre and Olivier Soupa.

## About the FactBook – Hydrogen-Based Energy Conversion

The FactBook provides an extensive technoeconomic analysis of the entire value chain, from power conversion to end-uses of hydrogen. The objective was to view the hydrogen industry through a technological prism, revealing barriers to progress and providing stakeholders – be they policy-makers, energy professionals, investors or students – with the tools needed to understand a complex and often misunderstood sector. In addition, the Energy Transition Institute summarizes and assesses nine business cases for hydrogen, based on academic literature and research.

## About the A.T. Kearney Energy Transition Institute

The A.T. Kearney Energy Transition Institute is a nonprofit organization. It provides leading insights on global trends in energy transition, technologies, and strategic implications for private sector businesses and public sector institutions. The Institute is dedicated to combining objective technological insights with economical perspectives to define the consequences and opportunities for decision makers in a rapidly changing energy landscape. The independence of the Institute fosters unbiased primary insights and the ability to co-create new ideas with interested sponsors and relevant stakeholders.

# Table of Contents

<b>1. Making the case for hydrogen conversion</b> .....	<b>4</b>
1.1 The need for flexibility.....	5
1.2 Hydrogen-based conversion solutions.....	10
<b>2. Techno-economic analysis of the H<sub>2</sub> value chain</b> .....	<b>15</b>
2.1 Water electrolysis .....	16
2.2 Hydrogen storage & transport .....	20
2.3 Re-electrification .....	24
2.4 Power-to-gas .....	27
2.5 Power-to-liquid fuels .....	33
2.6 Hydrogen mobility .....	34
2.7 Industrial uses .....	37
<b>3. Business cases</b> .....	<b>40</b>
3.1 Monetizing hydrogen conversion .....	41
3.2 Challenges .....	45
<b>4. Environmental impact, safety &amp; social acceptance</b> .....	<b>48</b>
<b>5. Outlooks</b> .....	<b>52</b>
<b>Appendix &amp; bibliography</b> .....	<b>59</b>


# 1. Making the case for hydrogen conversion



# Wind and solar photovoltaic are at the forefront of power-sector decarbonization and set to expand rapidly

## Wind & solar Photovoltaic [PV] technologies lifting off

(estimates for 2013-2017) Capacities in GW (left axis) and generation in TWh (right axis)

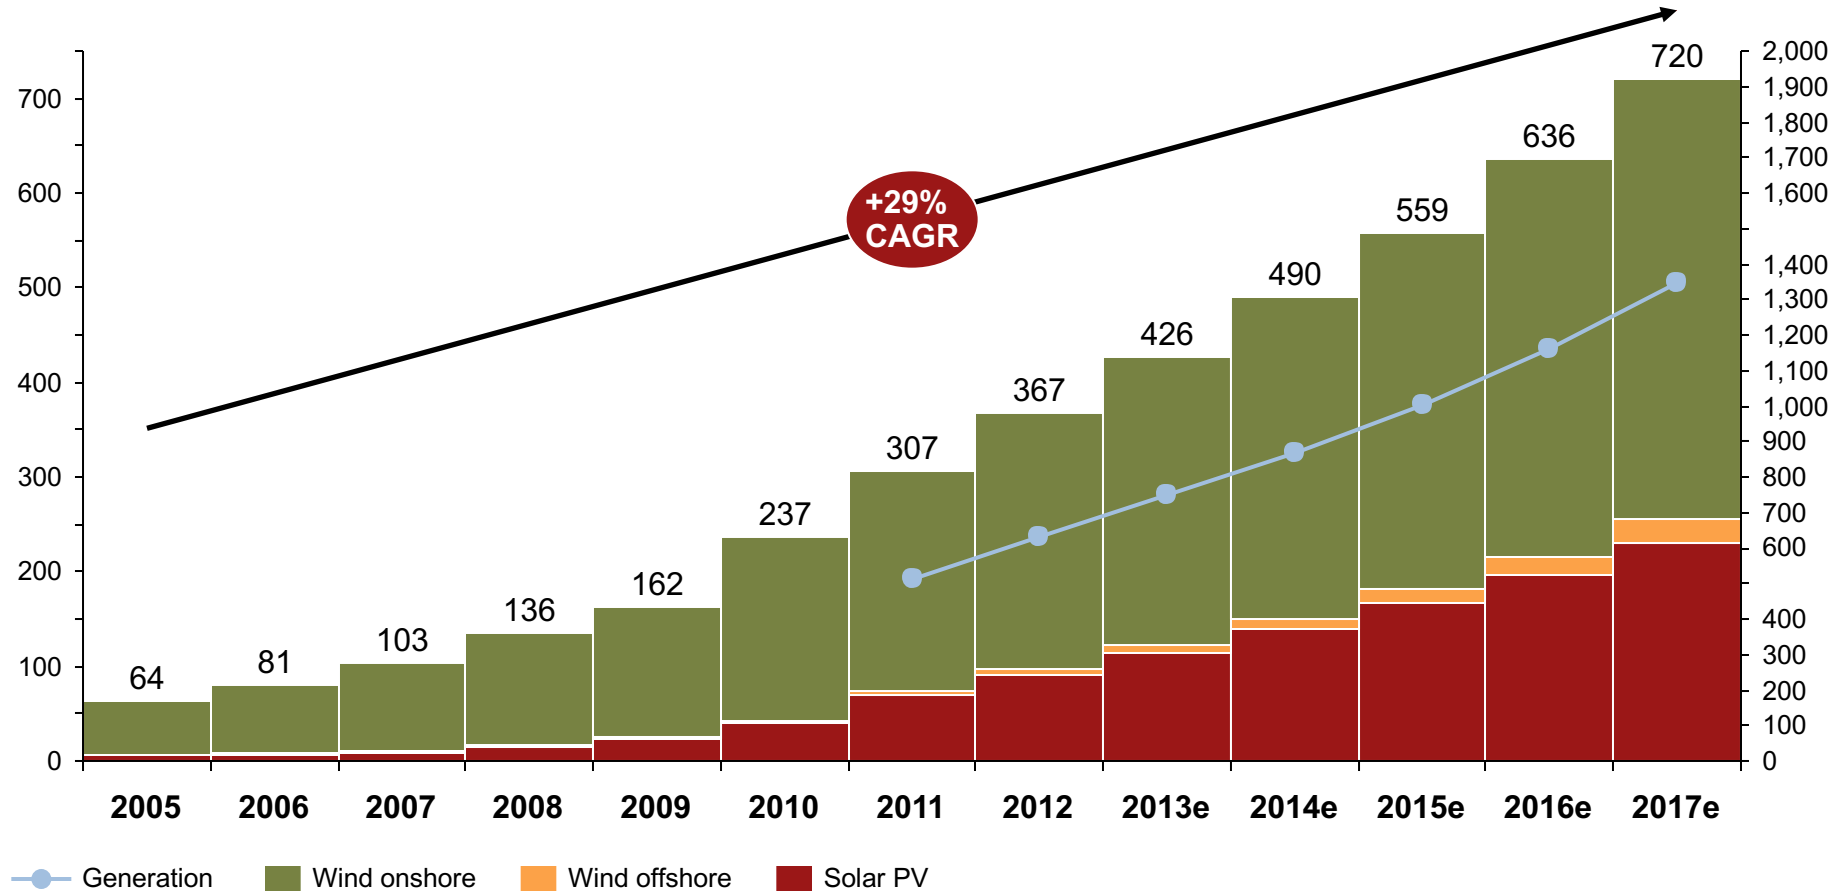


1. CAGR: compound annual growth rate.  
Source: IEA (2012a); IEA (2012b).

The variable output of wind and solar PV makes demand-supply matching more difficult and increases the need for flexibility within the system

## Wind & solar generation vs. demand in northern germany

MW, December 2012 on the 50Hertz Operated Grid

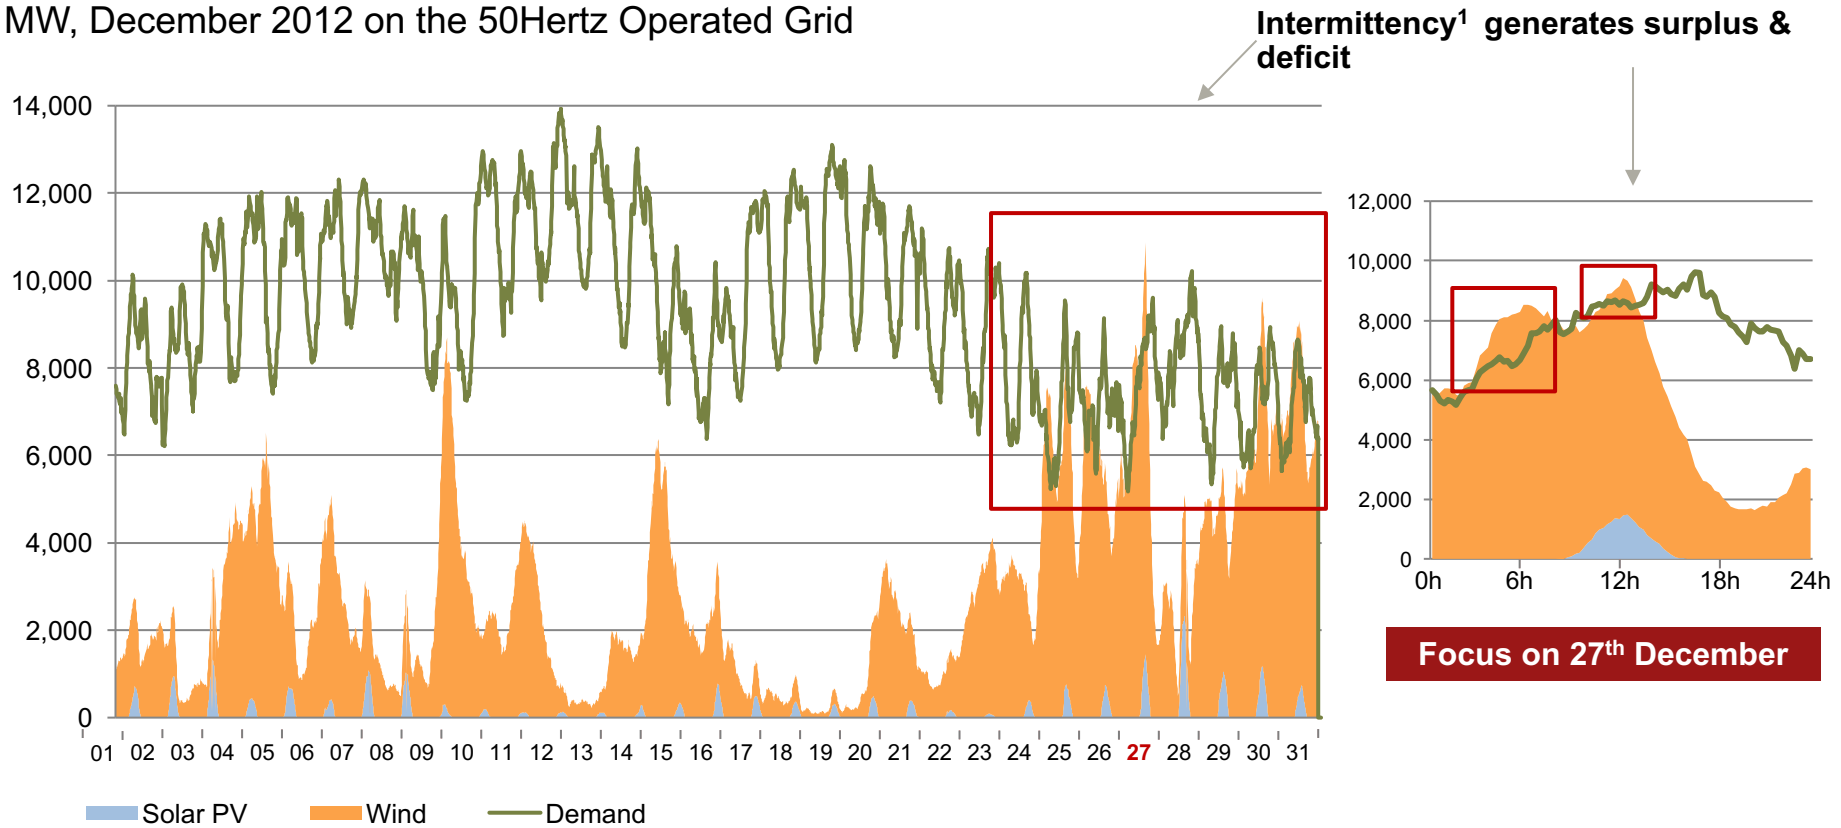


1. Output is variable on multiple timescales, depending on daily or seasonal patterns and on weather conditions; 2. This variability makes long-term forecasting difficult and certainly less predictable than output from conventional technologies; 3. Wind and solar output are subject to ramp events


New flexibility resources must be developed in addition to dispatchable power plants

## Power system flexibility management<sup>1</sup>

### Flexibility needs

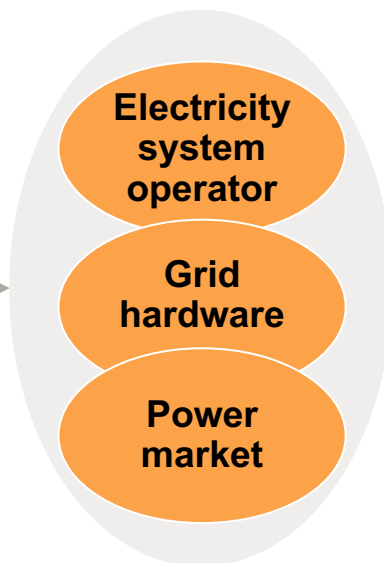

### Flexibility resources

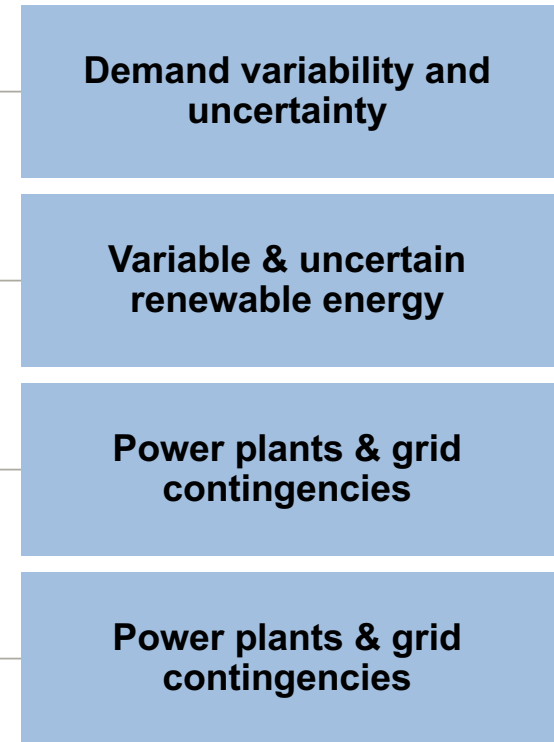


Flexibility management can also be optimized by perfecting models for forecasting output from intermittent, fine-tuning market regulations and refining the design of power systems

1. Up to a certain penetration rate, the integration of wind and solar into the power mix can usually be managed using existing flexibility sources, mainly dispatchable power plants. The threshold depends on the system's location and characteristics, and ranges roughly between 15% and 25%.


Source: A.T. Kearney Energy Transition Institute analysis based on IEA (2011a), "Harnessing Variable Renewables - A guide to balancing challenge". Hydrogen-based energy conversion

With the exception of pumped hydro storage, the deployment of electricity storage is at an embryonic stage

**Total electricity storage power capacity  
MW, 2012**

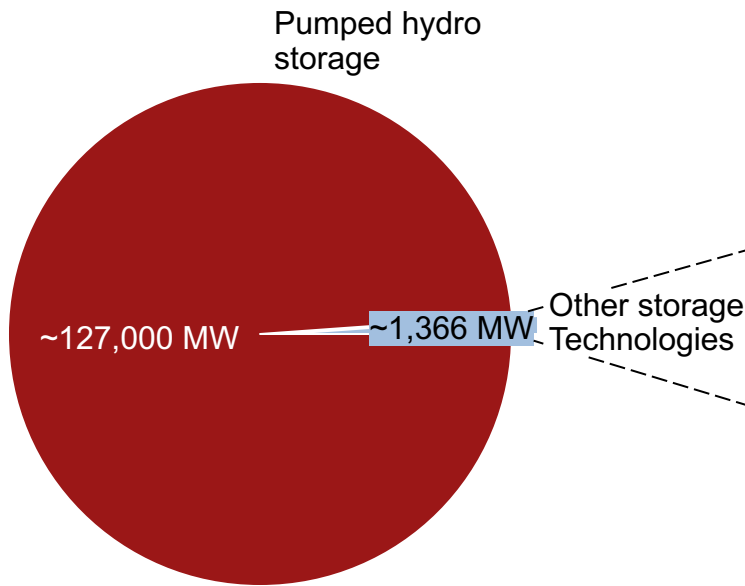

**Electricity storage capacity excluding  
PHS<sup>1</sup> MW, 2012**

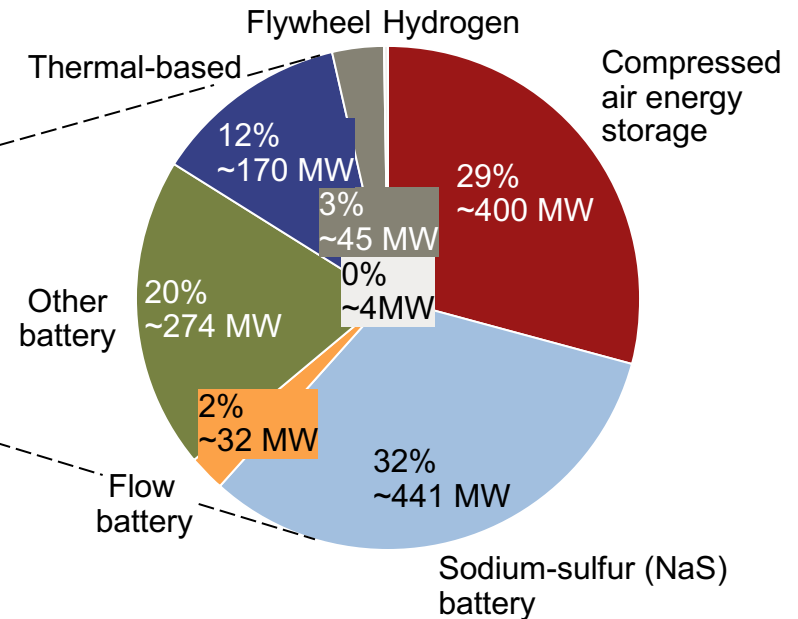

**Electricity storage is not a new concept. However, its development has been restricted to one technology: pumped hydro storage, which accounts for 99% of global installed power capacity.**

1. PHS: pumped hydro storage.


Source: A.T. Kearney Energy Transition Institute analysis based on Electric Power Research Institute – EPRI (2010), “Electricity Energy Storage Technology Options - A White Paper Primer on Applications, Costs, and Benefits”.

# The features of storage technologies must be matched to the requirements of various applications

## Storage Applications Requirements<sup>2</sup>

Discharge time vs. power requirements (MW)


### Discharge Time

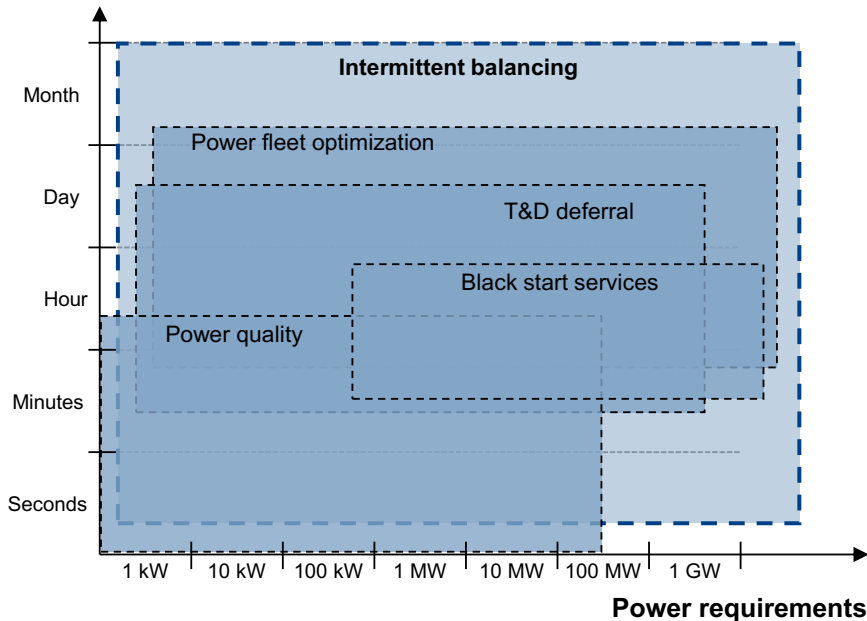


## Electricity storage technologies' features

Discharge time vs. power requirements (MW)

### Discharge Time

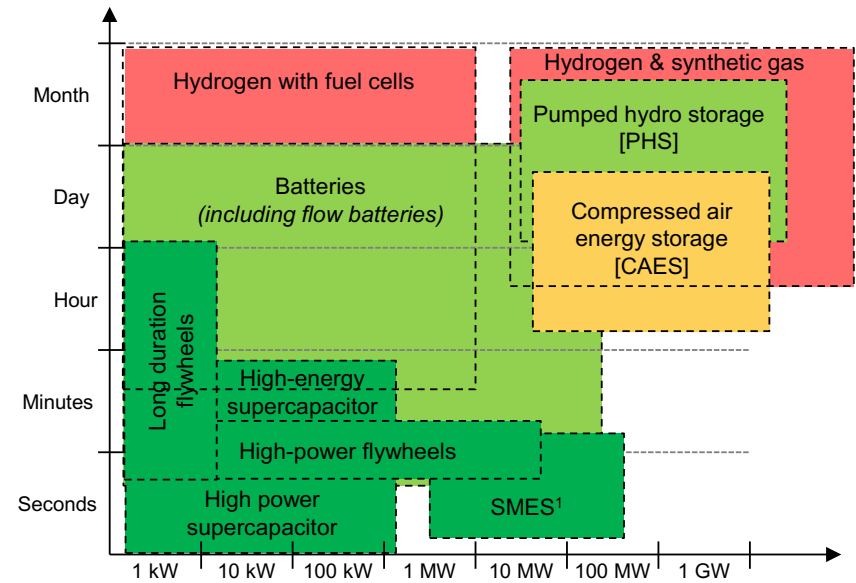

Efficiency of storage cycle



1. SMES: superconducting magnetic energy storage; 2. For more information on storage applications, please refer to the Hydrogen FactBook; 3. T&D for transmission & distribution  
 Source: A.T. Kearney Energy Transition Institute based on US DoE (2011), "Energy Storage Program Planning Document".

Hydrogen energy storage solutions are based on the conversion of electricity into a new energy carrier, hydrogen, by means of water electrolysis

### Hydrogen-based storage system – schematic representation

Charge

Store

Discharge

1


2

3

Hydrogen production

Hydrogen storage & transport

Hydrogen use

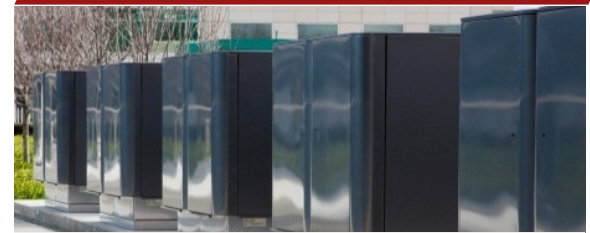

**Extraction** of green energy from variable renewables and **conversion** to a new carrier by means of water electrolysis<sup>1</sup>

Time and spatial **decoupling** of production and consumption

**Valorization** of the energy where and when it is needed **with or without conversion** to a new carrier

Electron-to-hydrogen

Hydrogen state

Hydrogen-to-electron

Hydrogen-to-gas

Hydrogen-to-motion

Hydrogen-to-chemical


Hydrogen-to-liquid fuels<sup>2</sup>

1. Water electrolysis is the process of using electrical energy to split water into its chemical constituents (hydrogen [H<sub>2</sub>] and oxygen [O<sub>2</sub>]), thereby converting electrical energy into chemical energy; 2. Fuel cell electric vehicles involve on-board re-electrification, but are considered as a 'direct' application of hydrogen in this report; Heating is considered an end-use in the study, and hydrogen-to-heat is therefore not displayed on the graph.

Source: A.T. Kearney Energy Transition Institute analysis.

# Exploiting hydrogen's versatility, chemical energy storage opens up alternatives to the usual approach to electricity storage


## Simplified value chain of hydrogen-based energy conversion solutions<sup>1</sup>

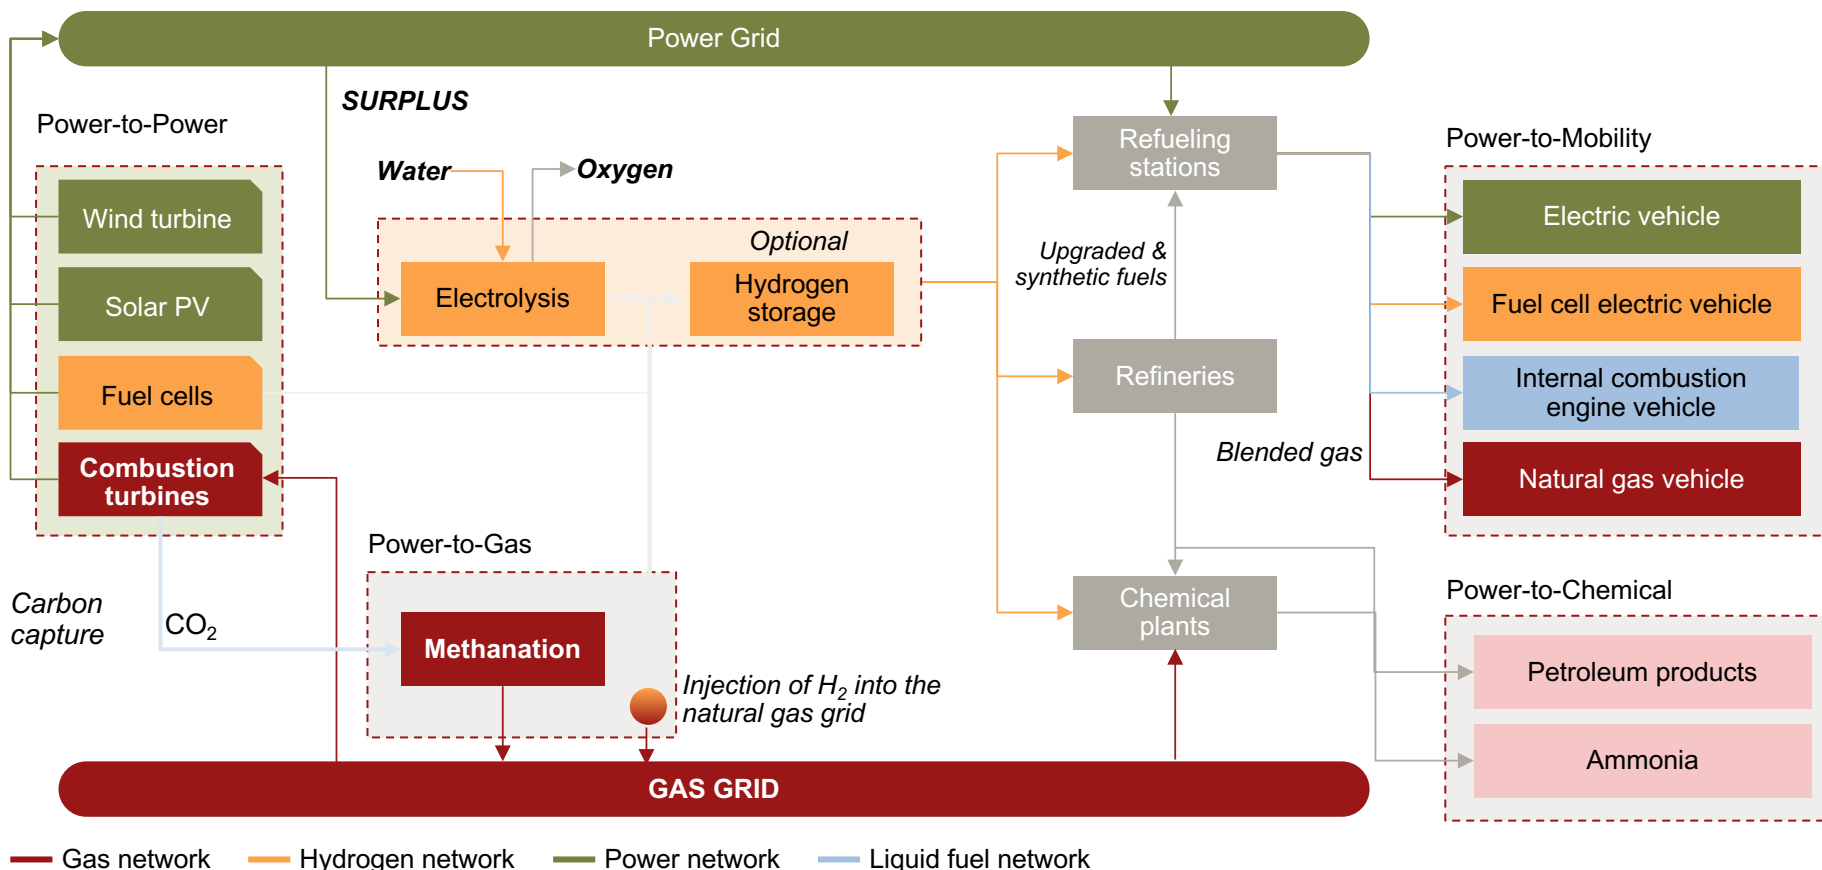

1. Simplified value chain. End uses are non-exhaustive. For more information on the technologies mentioned in this diagram, please refer to next chapter or to the Hydrogen FactBook. Source: A.T. Kearney Energy Transition Institute analysis.

Time: the physical properties of hydrogen make it particularly suited to large-scale, long-term re-electrification applications

## Comparison between hydrogen and conventional STORAGE – Illustrative simulation MW, 50 Hertz Data from 23<sup>rd</sup> January to 2<sup>nd</sup> February 2008

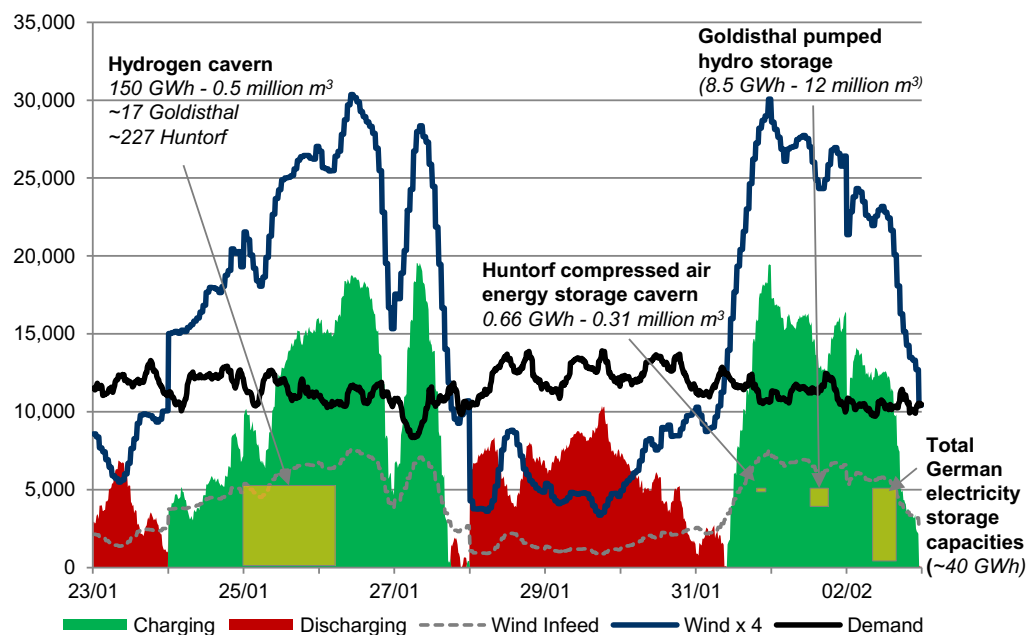


### How to read this graph?

- To simulate the storage potential that would result from a fourfold increase in wind capacity in northern Germany, the wind power that was actually generated and fed into the 50Hertz grid during the week of the 23/01-02/02/2008 (the dashed grey line) has been multiplied by four: this is the Wind x 4 blue line.
- The difference between this simulated wind power production and power demand<sup>1</sup> (black line) in that week is depicted by the green and red areas:
  - Green when simulated wind generation > demand, enabling storage charging
  - Red when simulated wind generation < demand, requiring storage discharge
- Finally, the yellow rectangles depict, on the same scale the energy-storage capacity of a typical hydrogen cavern and of existing storage plants in Germany: a CAES cavern (Huntorf), a PHS2 plant (Goldisthal), as well as the country's total electricity-storage capacity. The location of the yellow rectangles is unimportant.

1. Demand is assumed to be the same as it was in the same week in 2008; 2For existing pumped hydro plants, the volumetric energy density is estimated by Chen et al. (2009) to range between 0.5 and 1.5 kWh/m<sup>3</sup>.

Location: converting electricity to a new energy carrier enables extracted energy to be transported through alternative infrastructure

### Hydrogen-based energy transport routes<sup>1</sup>

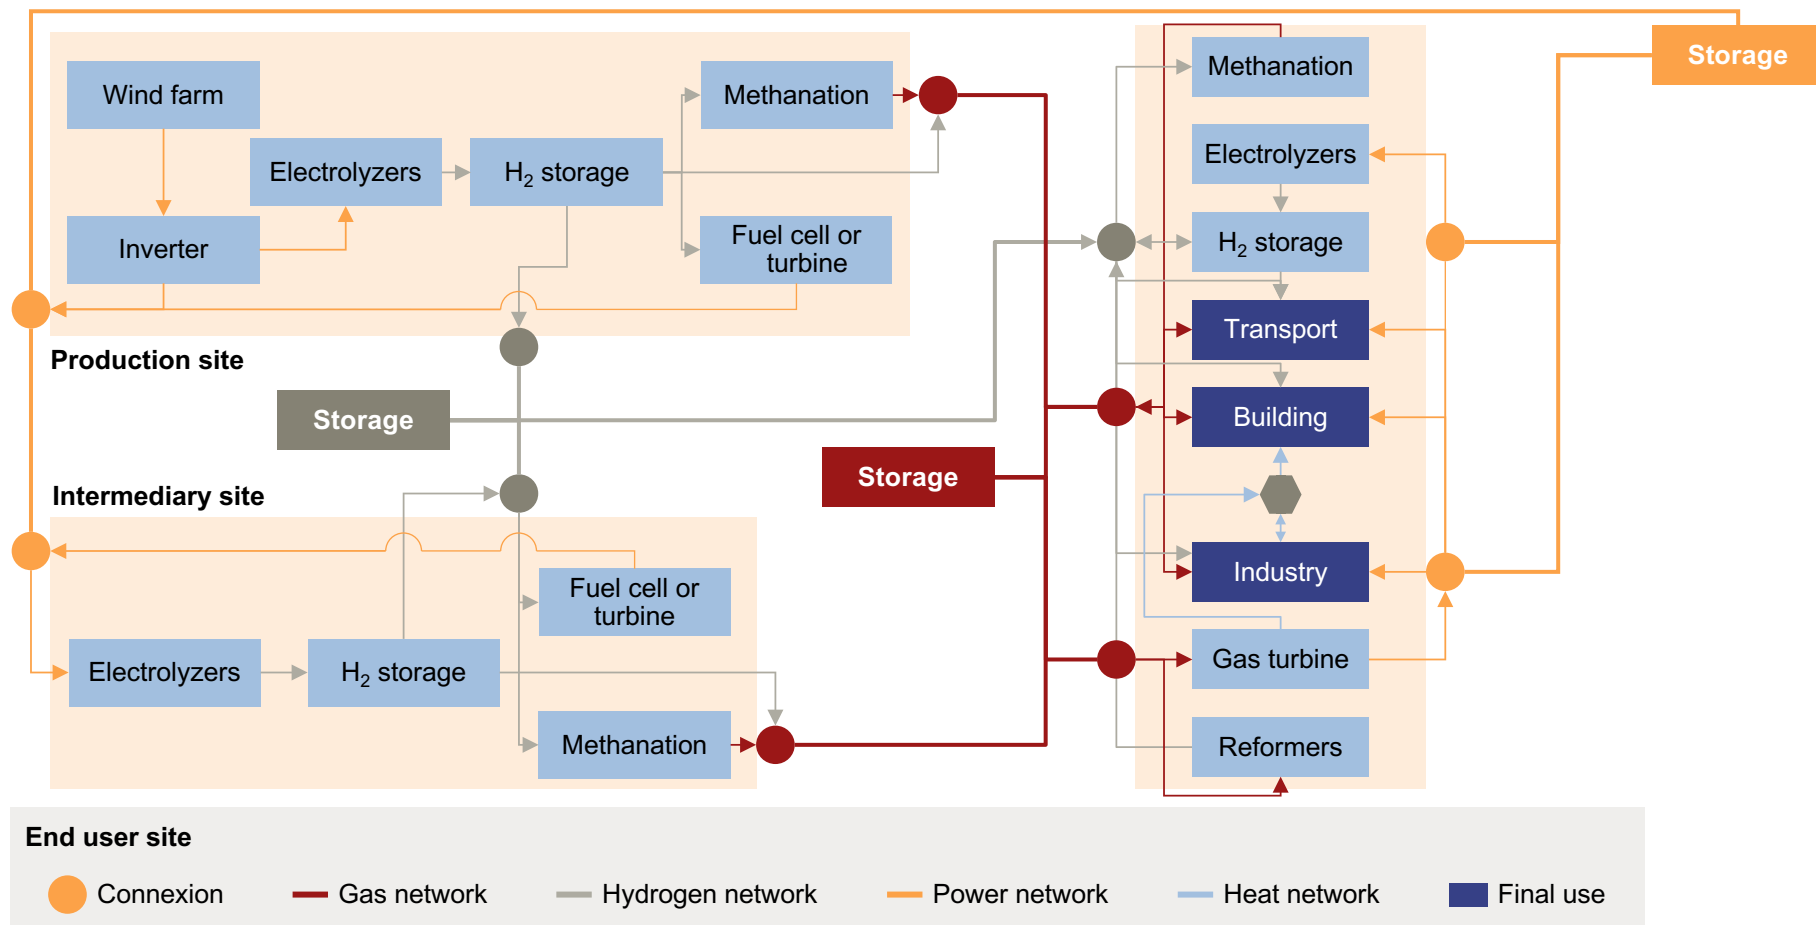



1. For more information on the technologies mentioned in this diagram, please refer to next chapter or to the Hydrogen FactBook. Source: A.T. Kearney Energy Transition Institute analysis.

# Application: hydrogen-based energy storage solutions are not restricted to providing electricity back to the grid

## Energy carrier distribution by end-use, 2009 and 2050


(IEA's 2DS scenario<sup>1</sup>) ExaJoules

**Electricity is only a limited part of the game**

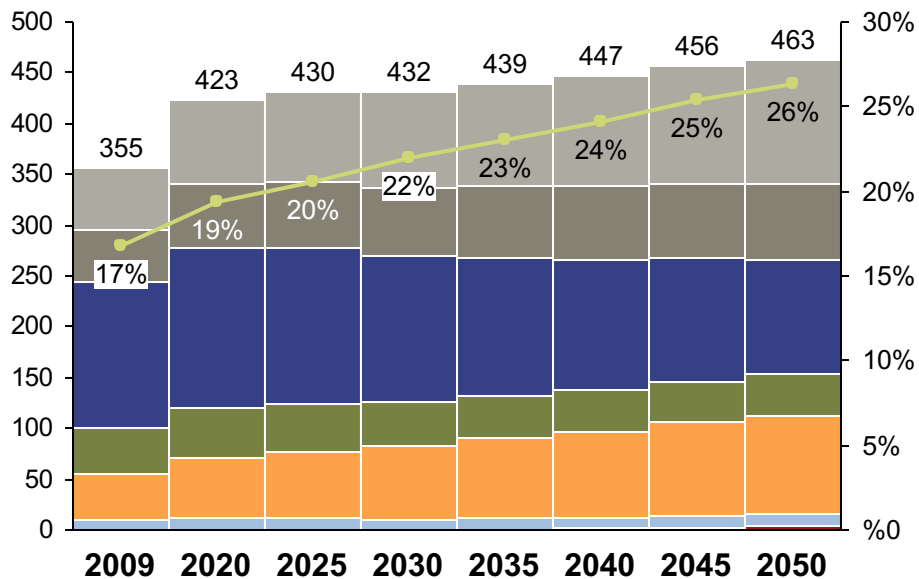

2009

2050 (2DS)

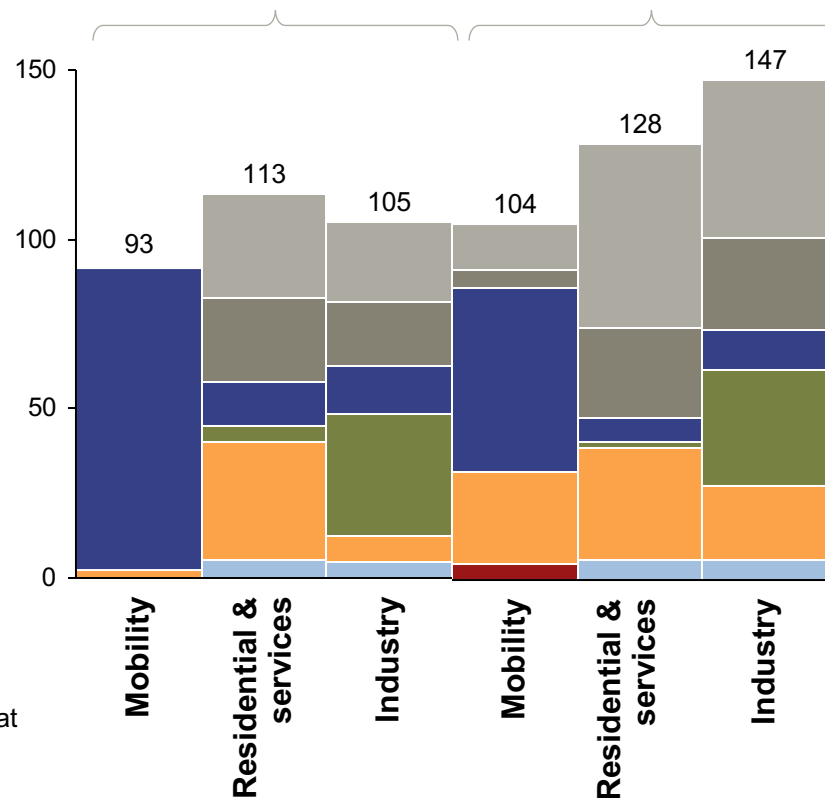

Note: 1The 2DS scenario is the IEA most ambitious decarbonization scenario and corresponds to a scenario that would limit global warming to 2°C by 2050; 2Renewables excluding power correspond mainly to biomass & waste, biofuels and solar thermal.


Source: A.T. Kearney Energy Transition Institute analysis; IEA (2012a).

## 2. Techno-economic analysis of the H<sub>2</sub> value chain



# Electrolyzers capable of tolerating variable loads are pre-requisites for hydrogen-based storage solutions

## History of water electrolysis

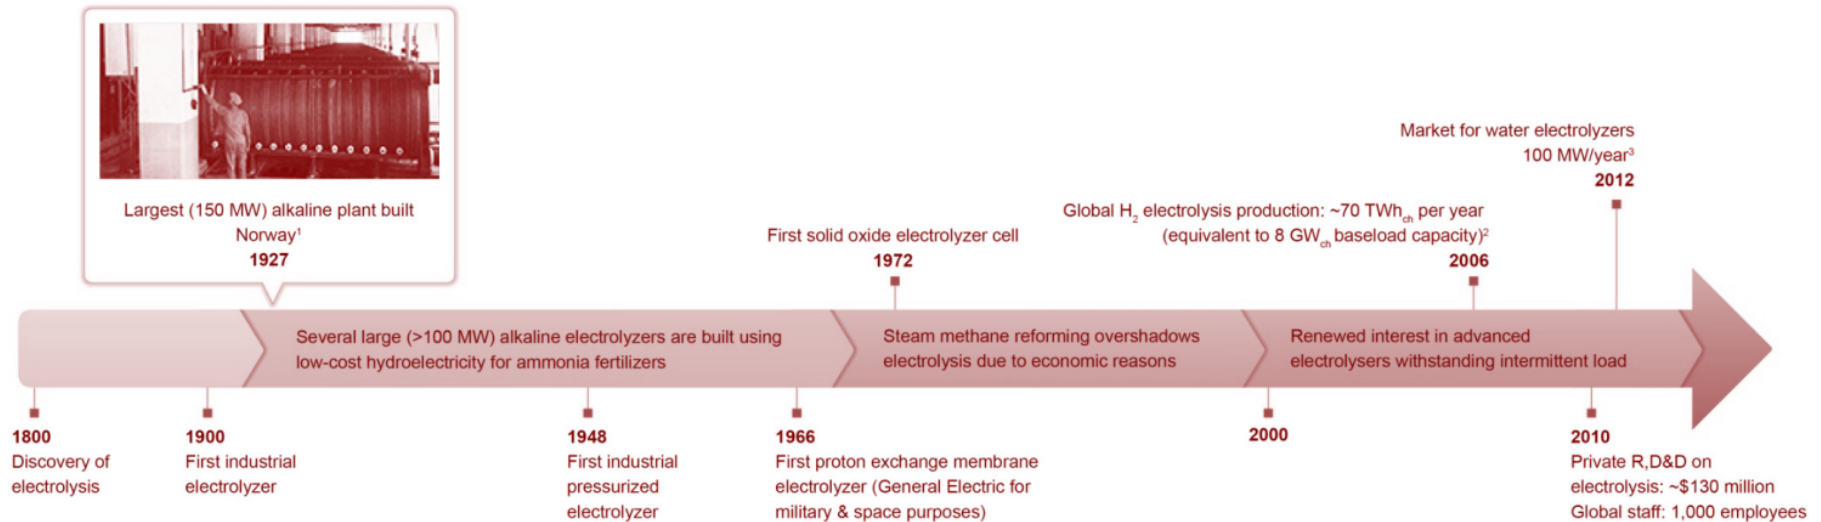

**Although continuous-load water electrolysis is a mature technology, the need for electrolysis systems to withstand variable loads requires significant flexibility and this has changed the game.**

Note: <sup>1</sup>The plant built in 1927 by Norskhydro consisted of 150 alkaline stacks of 1 MW each. It was used to produce hydrogen from nearby hydroelectric plant to produce ammonia for fertilizers.

Source: A.T. Kearney Energy Transition Institute analysis; image courtesy of NEL Hydrogen.

The momentum is with proton exchange membrane technology because of its ability to withstand variable electric loads and to supply pressurized H<sub>2</sub>

## Comparative performance of the three types of electrolyzers

Alkaline, proton exchange membrane [PEM] and solid oxide electrolyzer cells [SOEC]


	Alkaline	PEM	SOEC
<b>Comparative advantages Summary</b>	<ul style="list-style-type: none"> <li>• Cheapest option at the moment</li> <li>• Large stack size</li> <li>• Ultra-pure hydrogen output</li> </ul>	<ul style="list-style-type: none"> <li>• Ability to withstand variable load</li> <li>• Ability to operate self-pressurized</li> <li>• Design simplicity (modular &amp; compact)</li> <li>• Compact system</li> </ul>	<ul style="list-style-type: none"> <li>• Energy efficiency</li> <li>• Possibility of co-electrolysis (CO<sub>2</sub> or H<sub>2</sub>O)</li> <li>• Reversible use as a fuel cell (heat recycling)</li> <li>• No noble metals</li> </ul>
<b>Electrolyte</b>	KOH liquid	Polymer membrane	Ceramic membrane
<b>Charge carrier</b>	OH <sup>-</sup>	H <sup>+</sup>	O <sup>2-</sup>
<b>Temperature</b>	70-90°C	60-80°C	700-900°C
<b>Current density</b>	0.3 – 0.5 A/cm <sup>2</sup>	1 - 2 A/cm <sup>2</sup>	0.5 – 1 A/m <sup>2</sup>
<b>Technical maturity</b>	Commercial	Early commercial	R&D
<b>Max stack capacity (kW<sub>ch</sub>)</b>	3,000	~1,000	10 today,
<b>System capital costs (\$/kW<sub>ch</sub>)</b>	850 today, 550-650 expected <sup>2</sup>	1,000-2,000 today, 760 expected <sup>2</sup>	200 expected at 500 MW/yr production <sup>3</sup>
<b>System efficiency at beginning of life (% HHV)</b>	68-77% today, potentially up to 82% at 300 mA/cm <sup>2</sup>	62-77% today, potentially up to 84% at 1,000 mA/cm <sup>2</sup>	89% (laboratory), potentially above 90%
<b>Annual degradation<sup>1</sup></b>	2-4%	2-4%	17% (1,000h test only)
<b>System lifetime (years)</b>	10-20 proven	5 proven, 10 expected	1 proven

1. Power consumption increase per year in baseload utilization; 2. Expected by 2025 according to assumption from US DoE H2A model; 3. Expected if industrial production is reached.


Source: A.T. Kearney Energy Transition Institute analysis, based on EIFER (2011), Hydrogenics (2012), DTU (2012), Giner (2012), US DoE (2012) and FuelCellToday (2013).

At present, electricity price spreads on the spot markets are still too narrow to enable significant hydrogen-production cost reductions through price arbitrage

**Levelized Costs Of Hydrogen [LCOH] of a grid-connected electrolysis plant**  
 €/MWh<sub>ch</sub>, based on EPEX Spot price 2012 for Germany

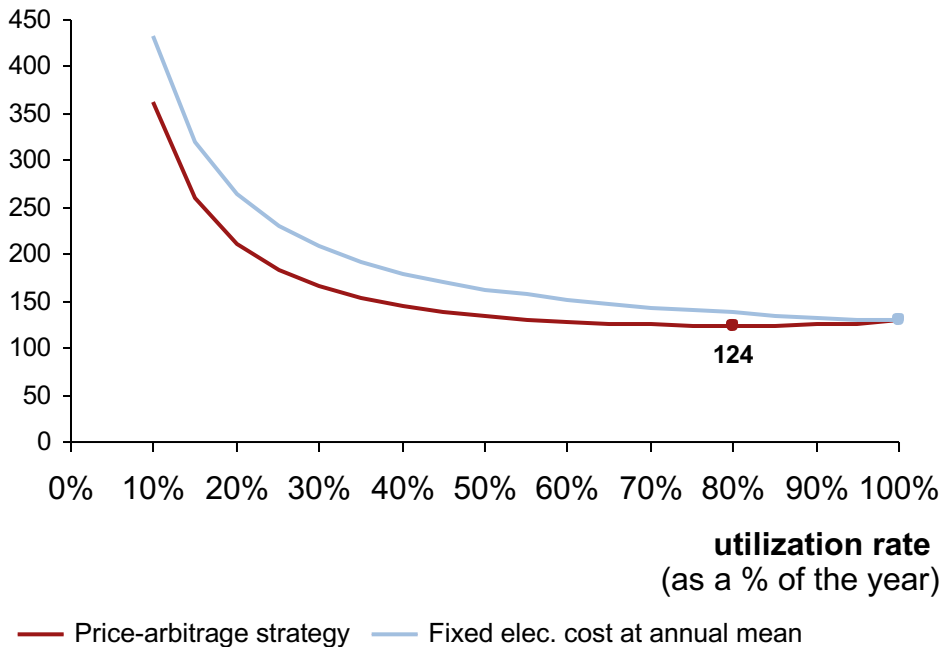


**2012 electricity spot price duration curve in Germany (€/MWh)**

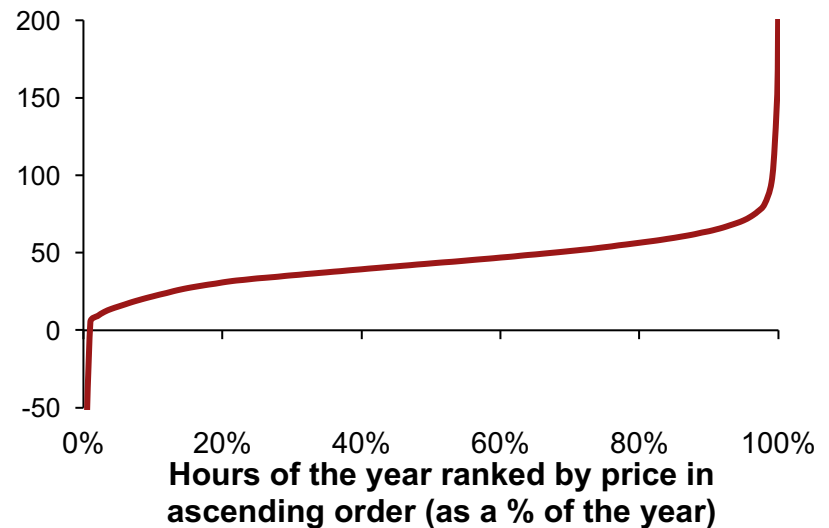

**Spot price arbitrage leads to an optimal plant utilization rate of 80%. As a result, LCOH would be reduced by only 4% compared with baseload mode. It is essential for electrolysis economics to be viable to complement revenues by provide grid services.**

The priority is to lower manufacturing costs, which have a greater impact than efficiency on the LCOH, if the electrolyzer is operated highly discontinuously


### Levelized Costs Of Hydrogen [LCOH] of a grid-connected electrolysis plant \$/MWh

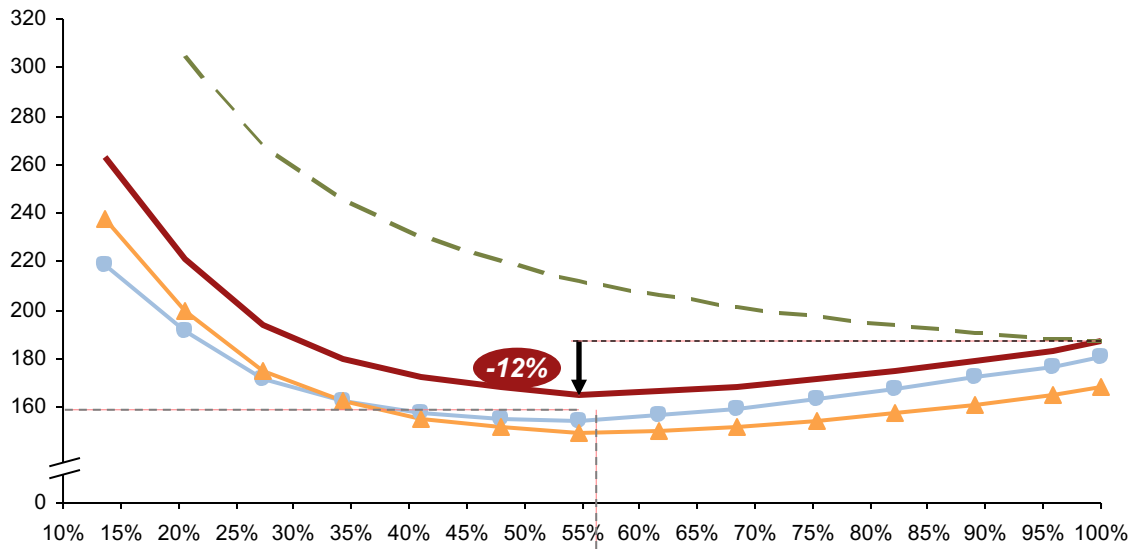

Production excess monetization ← **Plant load factor / utilization rate** (operational hours as a % the year) → Baseload

- Reference plant with price-arbitrage strategy
- CAPEX -20% with price-arbitrage strategy
- ▲— Efficiency +10% with price-arbitrage strategy
- ▲— Reference plant buying electricity at annual spot mean


### Electricity price distribution used to assess the LCOH (\$/MWh<sub>e</sub>)

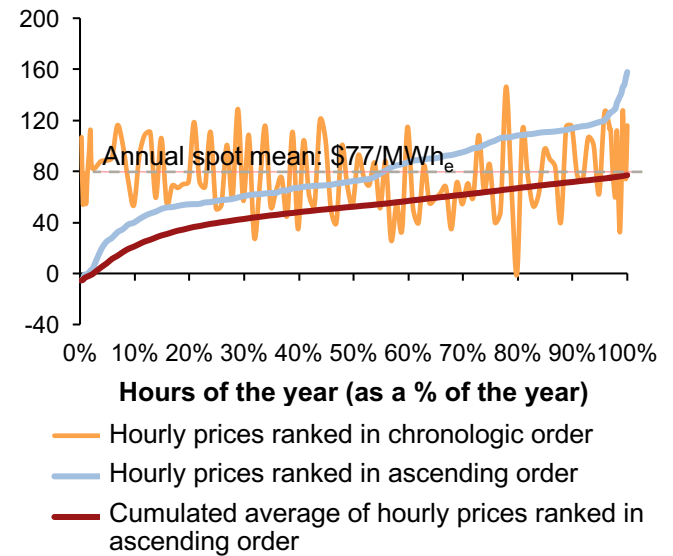

Note: Illustrative example based on 8.5MWch electrolysis (5 alkaline stacks of 7MWch each), with total installed system CAPEX: \$765/MWh, Efficiency: 79%HHV, Project lifetime: 30 years and real discount rate after tax: 10%. Source: A.T. Kearney Energy Transition Institute Simulation based on US DoE H2A Model.

Due to hydrogen very low volumetric energy density at ambient conditions, it needs to be conditioned before it can be practically stored and transported


## Hydrogen conditioning options before storage and transport options

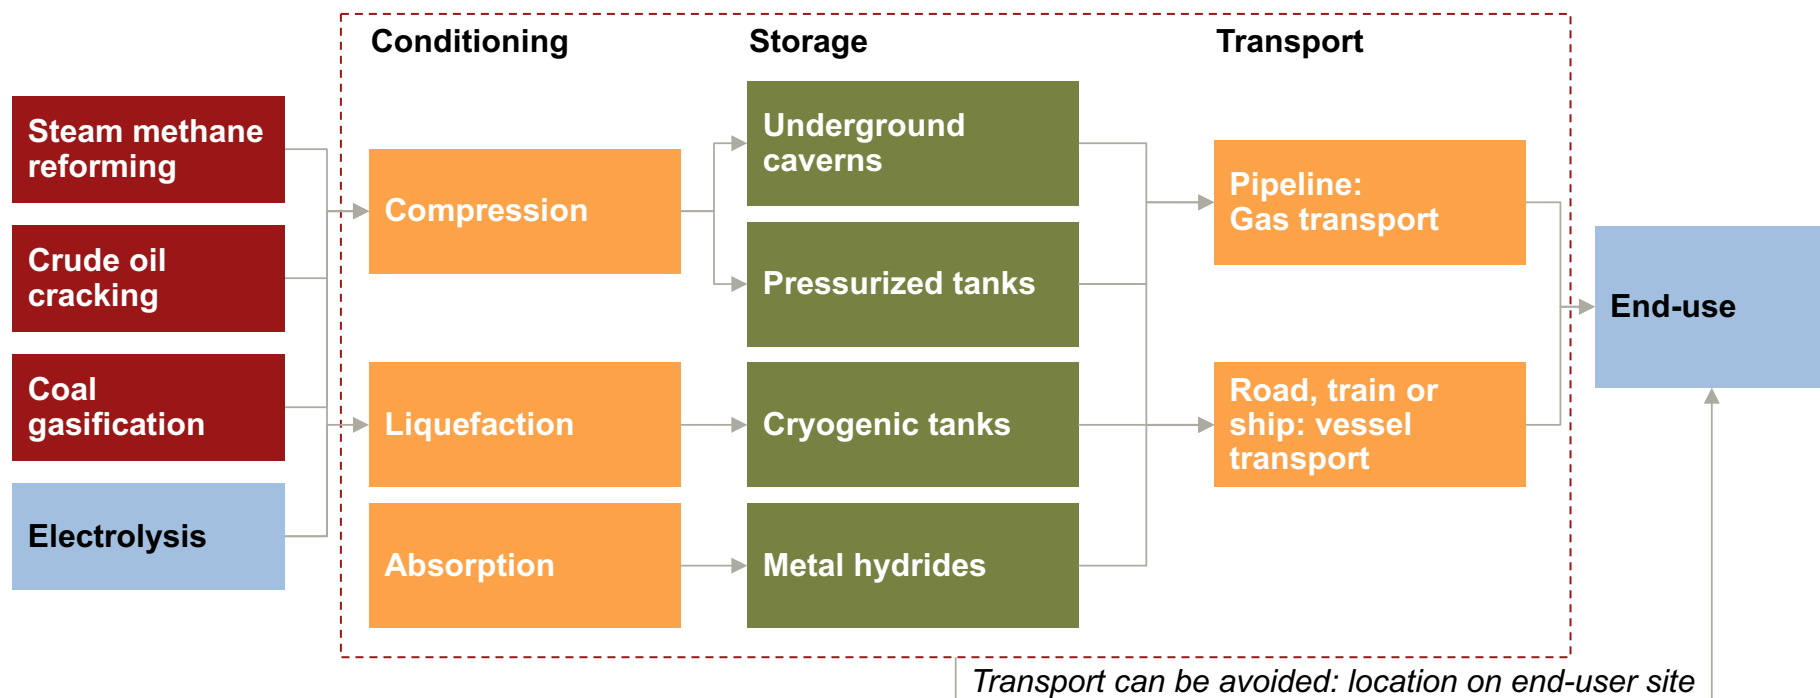


Hydrogen storage and transport form the most mature segment of the chain, benefiting from the chemicals and petrochemicals industries' experience of hydrogen utilization. The challenge is, first and foremost, economic. Due to hydrogen's very low volumetric energy density at ambient conditions, the volume of hydrogen gas produced by water electrolysis must be reduced in some way

# Hydrogen is likely to be stored predominantly in gaseous form, although metal hydrides may play a growing role

**\$/MWh – ranges in literature**

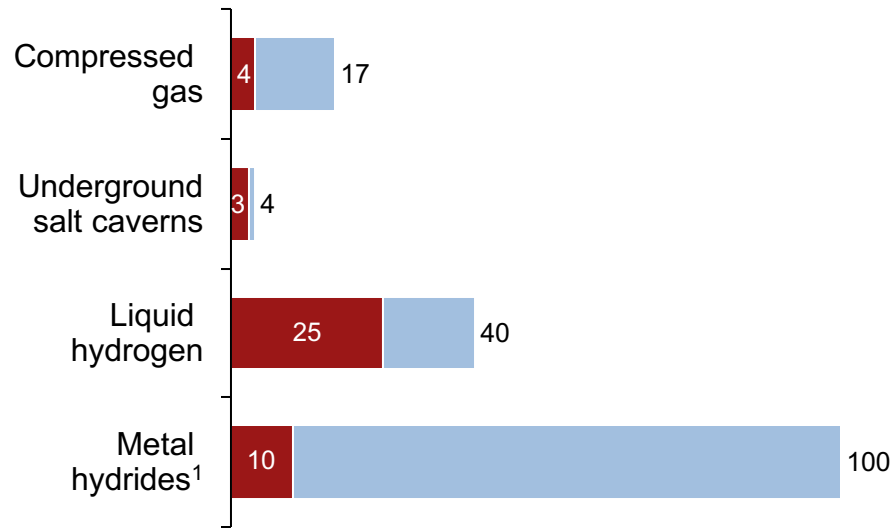

**Energy lost in processing and storage  
In % of energy input**

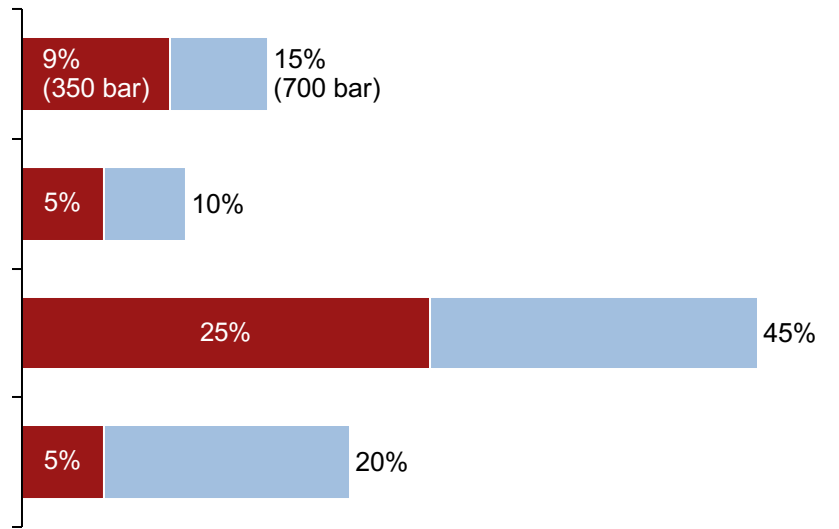

■ Low range ■ High range

- Pressurized tanks are likely to remain the main means of storing hydrogen. They are well suited to small- to mid-scale applications, safe thanks to years of experience, efficient and affordable, as long as the cycling rate is high.

- Underground storage in man-made salt caverns allows lower cycling rates and is the most competitive option for large-scale storage. However, bulk hydrogen storage seems unlikely to be needed in the near future and could suffer from limited geological availability.

1. The very large range reflects the level of maturity of the technology and, in particular, the uncertainty concerning large-scale manufacture of the hydrides alloy.

Source: A.T. Kearney Energy Transition Institute analysis, based on Hawkins (2006) and US DoE H2A delivery model.

# Underground storage in man-made salt caverns is a mature technology, but storage in aquifers and depleted oil and gas fields raises safety concerns

## underground reservoirs suitable for hydrogen storage

### Salt formations

The best option for underground hydrogen storage (and the only one that has been tried and used) consists of caverns mined in thick salt formations, at depths of up to 2,000 m. This host rock has a triple advantage over other geological formations: it allows a better cycling rate, needs only a small amount of cushion gas and its components do not react with hydrogen, avoiding gas poisoning. However, the costs are higher than its alternatives, and storage capacity lower.

### Depleted oil & gas fields

The pore space of permeable rock formations sealed by a closed surface layer in depleted O&G fields makes them pertinent candidates for high-volume underground storage. Their tightness has been proved over millions of years, lowering geological risk. However, the need for a large amount of cushion gas and the risk of H<sub>2</sub> contaminating other substances in the cavern (rocks, fluids and microorganisms) are significant barriers to progress and must be addressed.

### Deep aquifers

The storage of hydrogen in aquifers remains an immature concept. These structures require additional exploration, which is usually costly. Aquifers present the highest potential in volume to store hydrogen. However, risks related to pressure losses when hydrogen is injected at a high rate and the potential for the various components of the reservoir (rocks, fluids and microorganism) to react with hydrogen may deter development

- Salt deposits are the only type of geological formation successfully used to store hydrogen underground to date. There are three facilities in operation for refining purposes in Texas (Moss Bluff, Spindletop and Clemens Dome) and in the United Kingdom (Teesside).
- Since these caverns are man-made, their size is largely customizable, albeit constrained by the dimensions of the salt formation.
- The shortage of suitable salt deposits, however, is a major hindrance to widespread use. Salt formations are unevenly distributed throughout the world and not all salt formation are suitable for H<sub>2</sub> storage.
- Research into alternatives to salt storage – *i.e.* natural reservoirs in deep aquifers and depleted oil & gas fields – is under way (*e.g.* Hychico in the Argentinian province of Chubut, is injecting H<sub>2</sub> into depleted gas fields, and testing for leaks and reactivity with the host rock)

# Decentralized hydrogen production is essential in order to minimize hydrogen-transportation costs


## Schematic layouts of integrated projects

### Centralized

(Grid-connected power plant or regional hub near electricity congestion points)

### Decentralized

(Energy consumption site)

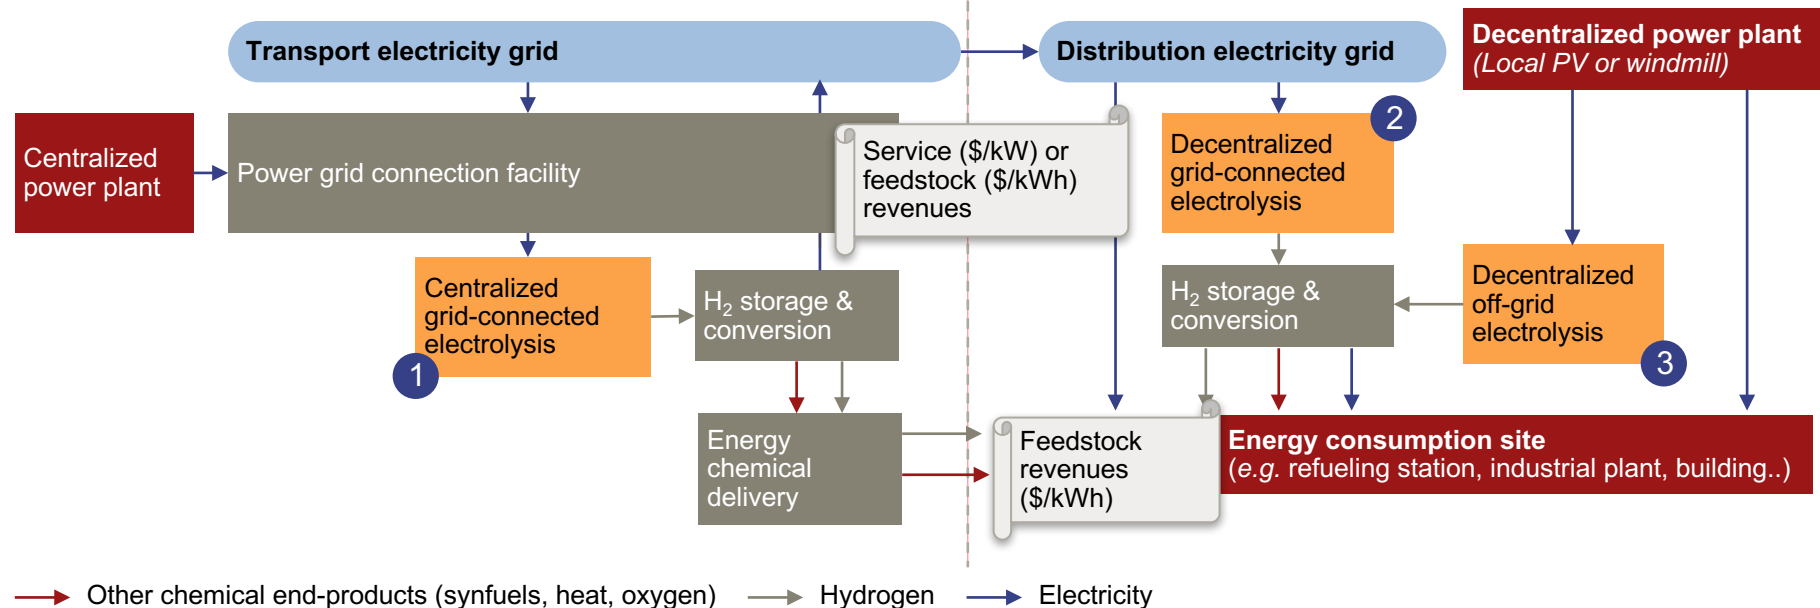


**Decentralized production will be preferred to avoid the cost of transport<sup>1</sup>. When H<sub>2</sub> transport is still pertinent, the choice of transport depends on transport distance, on H<sub>2</sub> throughput and on the distribution of end users<sup>2</sup>.**

1. H<sub>2</sub> transportation, in itself, incurs limited energy losses in addition to those incurred by conditioning, but requires high up-front capital cost for pipeline and significant operation cost for road transport. Road transport enables distributed delivery (short distances & low throughputs in tanks, large quantity delivered over long distance for liquid H<sub>2</sub>). Pipelines can provide a low-cost option for point-to-point delivery of large volumes of hydrogen. The final layout could include a mix of solutions, such as decentralized electrolysis located on end-user site, with a centralized production centers as delivered with road transports.  
Source: A.T. Kearney Energy Transition Institute analysis.

Hydrogen can be re-electrified in a direct electrochemical process, using fuel cells, but also using conventional thermal combustion turbines

## Energy forms in the two re-electrifications pathways

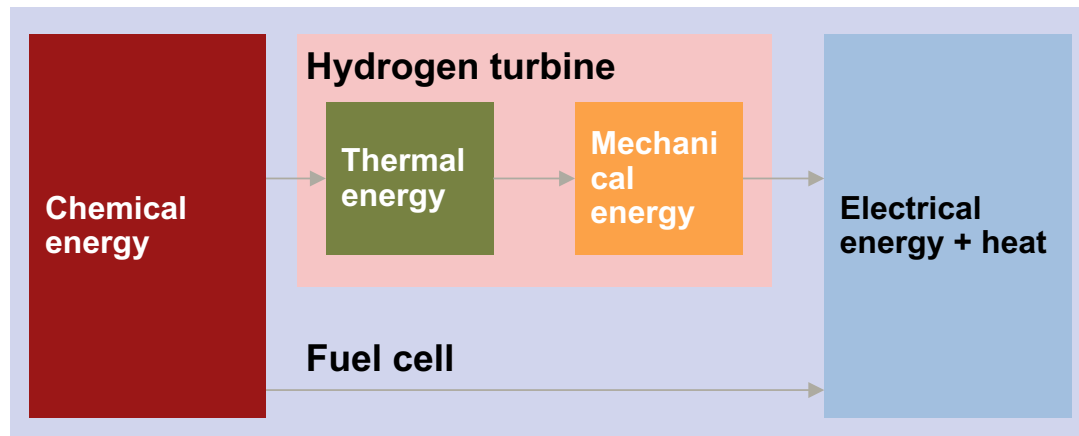


Fuel cells<sup>1</sup> (left) and turbines<sup>2</sup> (right) do not compete for the same applications: fuel cells are much more suited to decentralized designs and prioritize reliability, autonomy and low-maintenance; turbines are more suited to large-scale centralized projects because of economies of scale.

- Hydrogen can be re-electrified using fuel cells, but also using conventional thermal combustion turbines.
- Combustion turbines can be used to burn hydrogen - essentially a fuel gas. Pure-hydrogen turbines remain in the early demonstration phase because of limited demand, but would pose only moderate technical issues. However, most turbine manufacturers focus their attention on the use of mixture of natural gas and hydrogen into existing power plants. The latter raises safety, performance and environmental issues above a ratio of 1-5% of hydrogen by volume.
- Fuel cells have long been under development, driven by the promise of fuel-cell-electric vehicles. They are now in the early commercialization phase, mainly because of the growing popularity of stationary applications. Because the technology in fuel cells and electrolyzers is basically the same, the issues are similar: manufacturing costs and lifetime. Fuel cells are generally slightly less efficient than electrolyzers, but technically more mature.

Hydrogen re-electrification results in poor round-trip efficiency, which is likely to impede its development in the short term

### Losses along the stored hydrogen re-electrification value chain<sup>1</sup>

MWh, Based on a 100 MWh storage system with no hydrogen transport

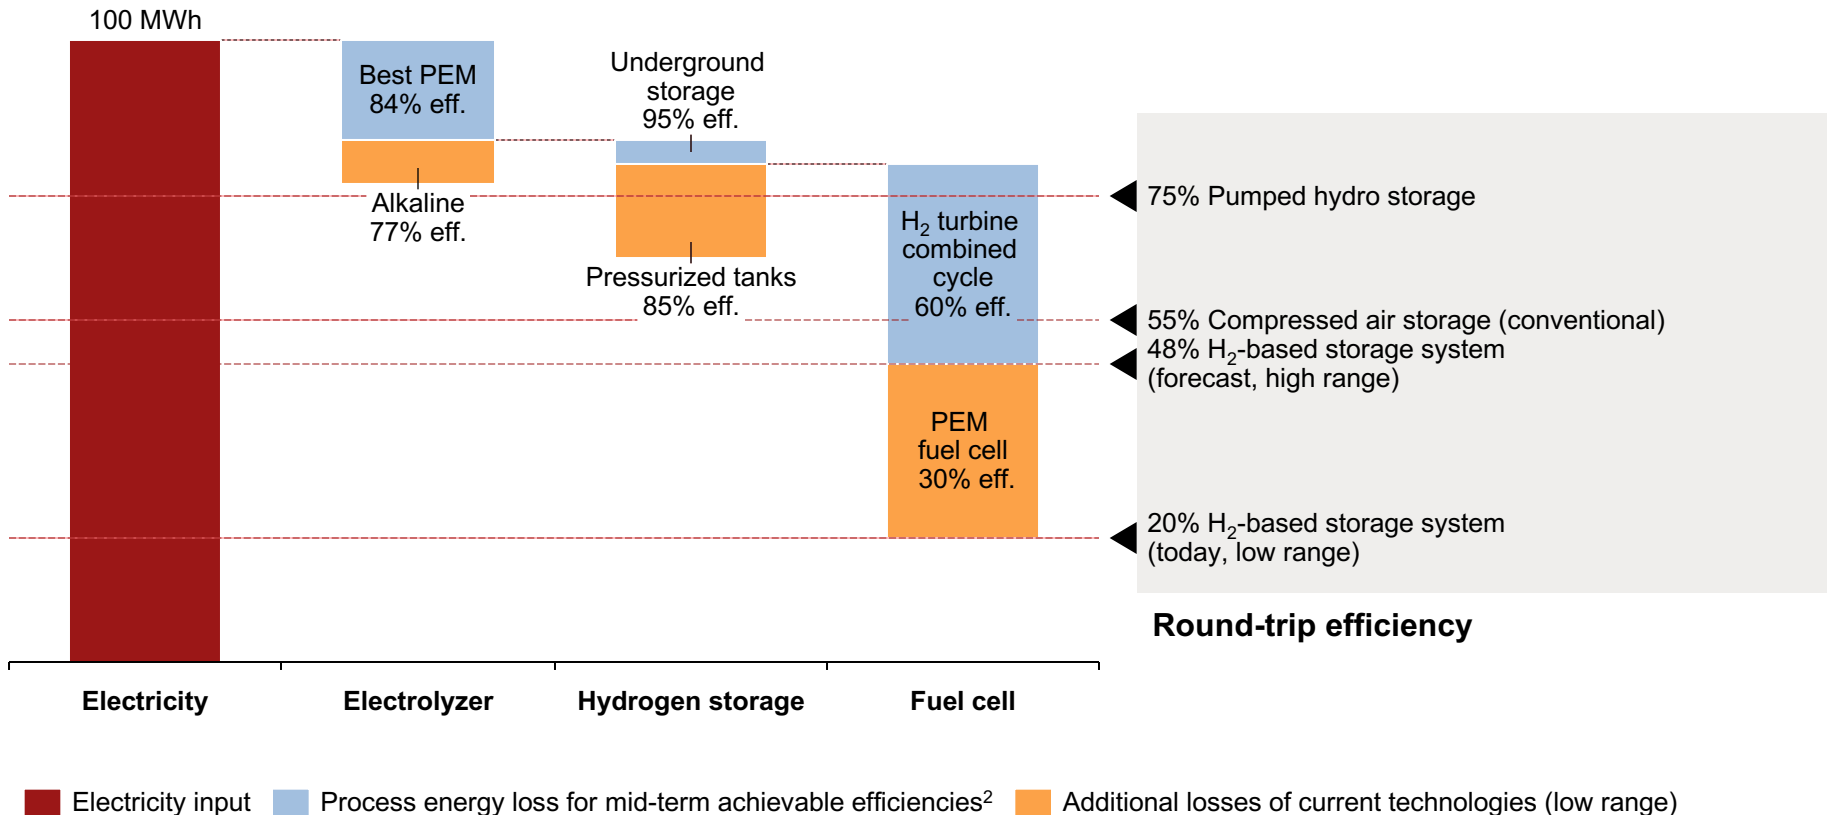


Note: 1The waterfall presents the maximum range of best mid-term efficiencies together (84% for electrolyzers, 95% for storage, and 60% for re-electrification) and lowest current efficiencies combined (77% for electrolyzers, 85% for storage and 30% for re-electrification); 2Mid-term (<10 years) realistic target for efficiencies.  
 Source: A.T. Kearney Energy Transition Institute analysis.

Fuel cells could yet be successful in applications where reliability and a low maintenance requirement are highly valued

## Autonomous system for PV-powered telecom tower

A remote location

**PV/H<sub>2</sub> vs. PV/diesel systems:  
boundary curve**

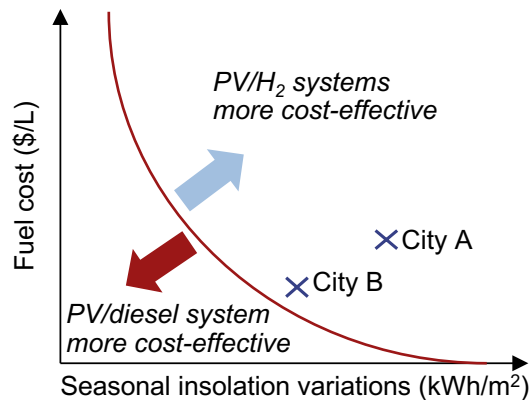

**PV-powered telecoms tower in India**



- Fuel-cell technologies are extremely reliable because they lack moving parts. Fuel cells could be particularly successful in applications where reliability and a low maintenance requirement are highly valued, such as back-up and auxiliary power, and uninterruptible power supply.
- One of the most promising markets is expected to be off-grid telecom towers in developing countries. In cases such as these, the main competitor to H<sub>2</sub> solutions would be diesel generators. Solar PV or wind turbine energy systems that incorporate batteries for diurnal storage and hydrogen storage solutions for smoothing seasonal variations are close to competitiveness in some countries. This illustrates the role that emerging countries may play in the development of off-grid energy storage because of the lack of legacy networks.


### How to read this graph?

- Several case studies have examined the conditions under which autonomous PV/H<sub>2</sub> systems could compete with PV/diesel for very small-scale applications. In both cases, batteries are required to overcome the short-term supply variations of solar electricity generation, but they do not compensate for the seasonal mismatch of PV output in high-latitude regions, which is managed by diesel generators or H<sub>2</sub>-based systems.
- The sensitivity criteria are the cost of on-site diesel and seasonal insolation variations. According to these criteria, a boundary curve delineates where the two systems are equally cost-effective.
- Case studies argue that PV/H<sub>2</sub> systems for small-scale applications could be a pertinent in most regions by 2015. India is arguably the largest market for autonomous telecoms towers, where fast-spreading infrastructure is overly reliant on diesel, because of inadequate electricity grids.

Power-to-gas may change the rules of the energy game by linking the natural gas grid with the power grid

## Pathways between energy carriers

Power-to-gas pathway in red

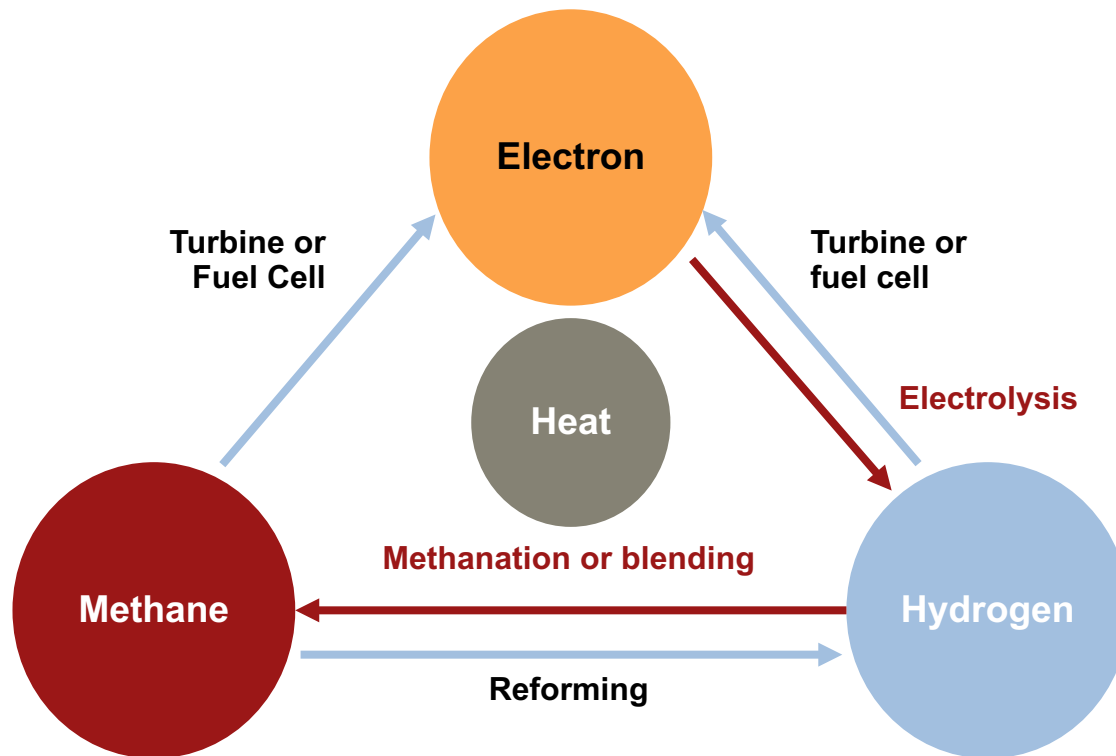


- P2G was conceived as a way of using the gas grid to store renewable electricity. But, in practice, P2G does more than this. Its benefits include:
  - The “greening” of end-uses of natural gas, such as heat generation;
  - The pooling of gas and power infrastructure to optimize the flexibility of the energy system.
- Power and gas grids can be linked in two ways:
  - Blending, which involves injecting hydrogen into the gas grid;
  - Methanation, i.e. the conversion of hydrogen and CO<sub>2</sub> into methane, also known as synthetic natural gas [SNG].

Although parts of the gas grid that do not feed critical appliances can tolerate up to 20% H<sub>2</sub> by volume, setting national limits above 5vol.% will be difficult

## Limit of hydrogen blending along the natural gas infrastructure<sup>1</sup>


H<sub>2</sub> concentration (vol.%)

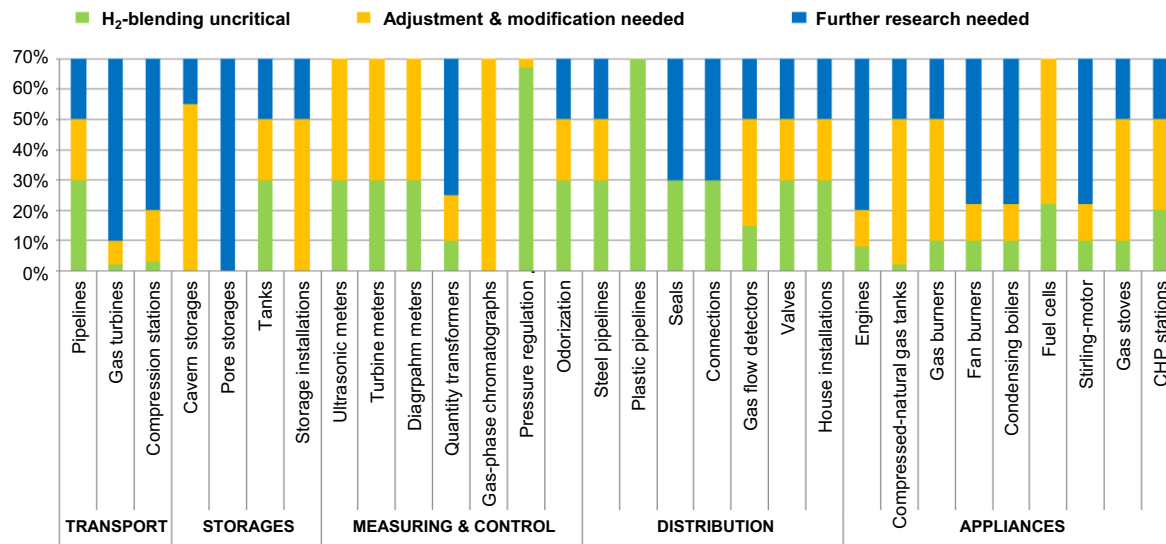

- Three main constraints must be addressed:
  - the integrity and safe use of pipeline and grid appliances;
  - the energy capacity of the grid;
  - the performance sensitivity of end-use appliances to hydrogen/methane blends.
- The latter is likely to impose the greatest limitation. In general, the gas grid should tolerate 1-5% volume blending at any point of the network, and up to 20% in distribution pipelines with no critical downstream appliances (and not made of exotic materials).

Hydrogen blending is an elegant early stage solution for monetizing electricity surpluses in countries with highly developed natural gas infrastructure

**Order of magnitude of German hydrogen blending potential at 5vol.% blending<sup>1</sup>**

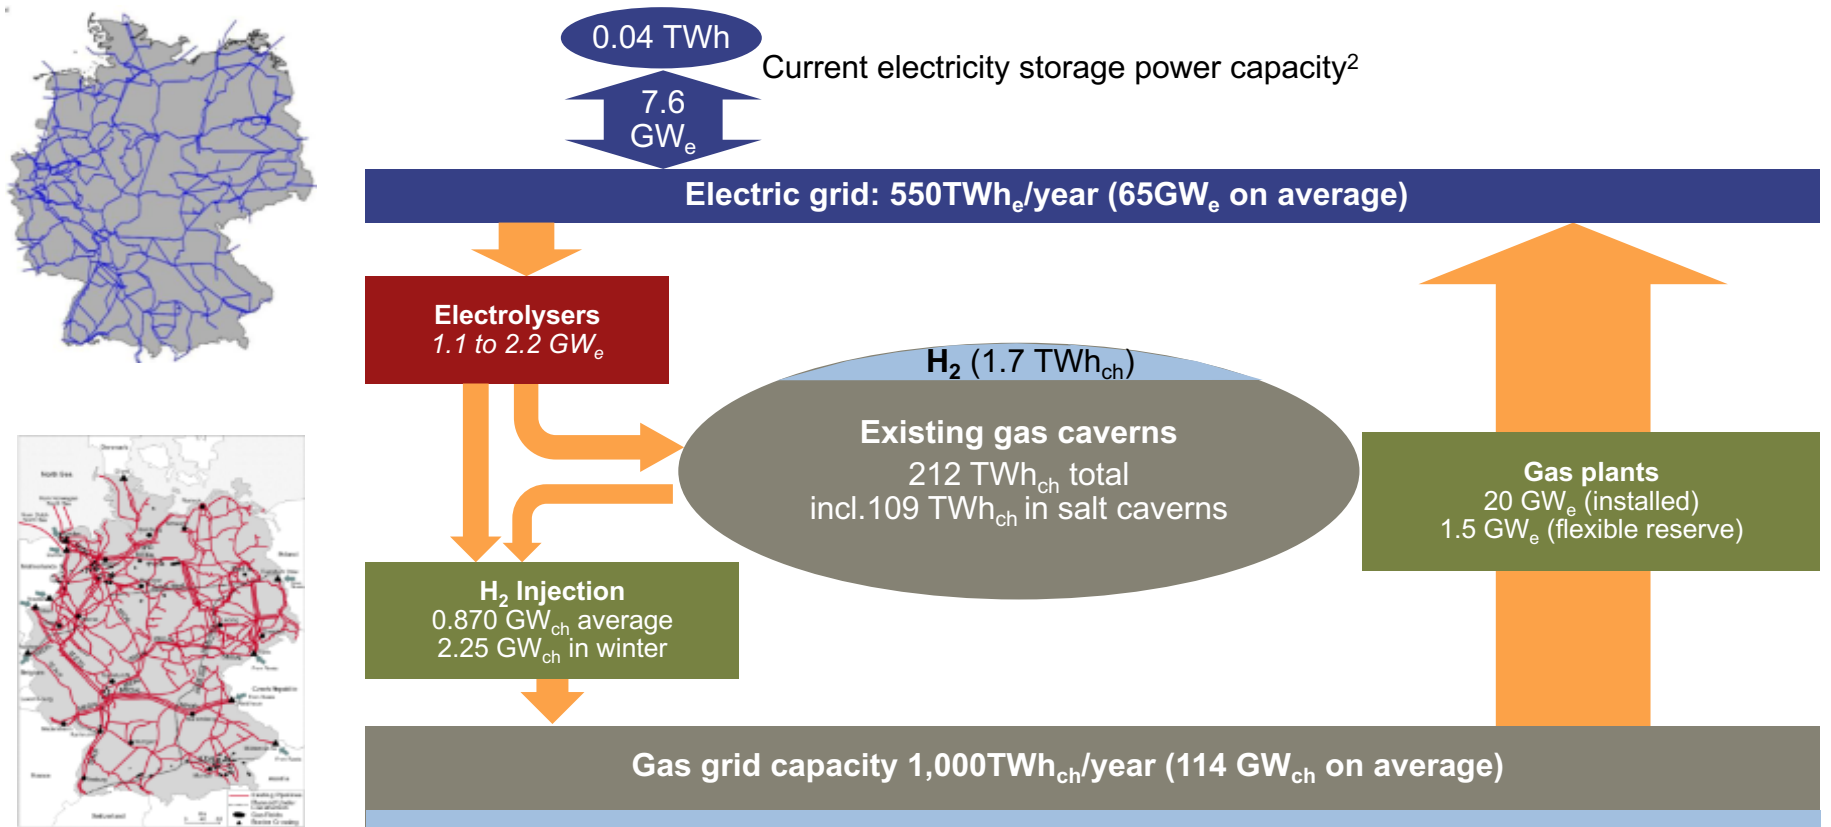


1. Order of magnitude for 5% blending in volume (i.e. ~5% in energy) where it does not affect the grid nor the end-use applications. It takes into account the dynamic of the seasonality of the grid (lowest demand in summer of 58 GW) for the injection rate (58 GW \* 5% = 0.870 GW). Electrolyzer could act as negative control reserve (9GW in Germany currently, including 7.6 GW of pumped hydro); 2. Current Electric Storage capacity corresponds mainly to Pumped Hydro Storage capacity, on top of the Huntorf Compressed Air Energy Storage Facility.

Source: A.T. Kearney Energy Transition Institute analysis, based on IER (2011) and ZFES (2012).

Methanation produces synthetic natural gas from H<sub>2</sub> and CO<sub>2</sub>, which is not subject to blending-ratio limits

## Power-to-methane process: illustration with the thermochemical route

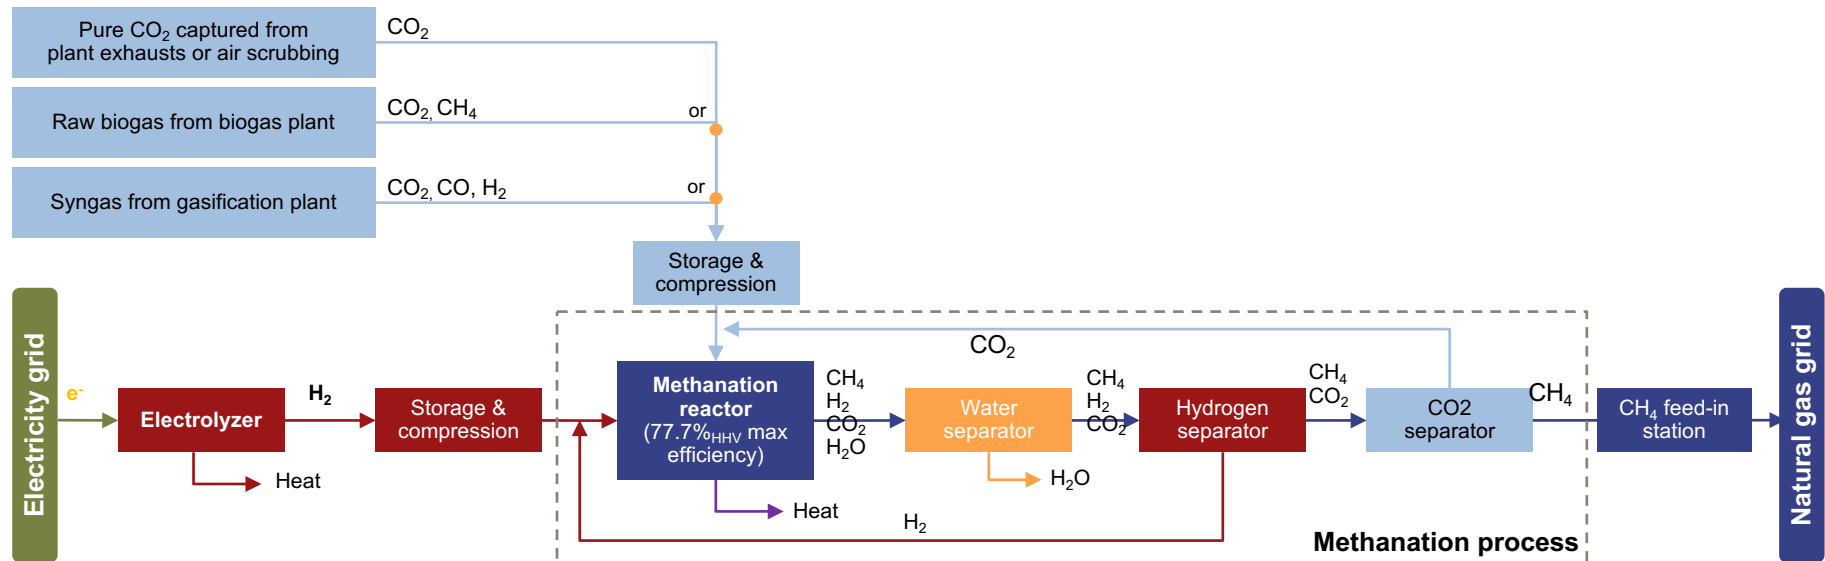


### How to read this diagram?

- The power-to-methane process reacts electrolytic H<sub>2</sub> with carbon dioxide to produce methane that can be injected into the natural gas grid. The siting of such plants is limited, economically, to locations near a large-scale, fossil CO<sub>2</sub> source and an existing gas pipeline. The methanation reaction has been well known since 1897, but integrated power-to-methane projects remain at an early demonstration phase. Two competing approaches are being tested – thermochemical (diagram above) and biological.
- Despite incurring additional capital costs and energy losses – of 40% when heat is not recovered – methanation is considered a promising way of getting round blending-ratio limitations. However, due to the process's huge CO<sub>2</sub> requirements, it is constrained by the availability of affordable CO<sub>2</sub> sources. CO<sub>2</sub> capture from air is extremely energy intensive, resulting in an efficiency drop from 60% to 39%.

Biomethane feed-in plants are the best CO<sub>2</sub> source for methanation, which is uneconomic without large sources of fatal CO<sub>2</sub>

**Simplified MASS flow chart of Hydrogen-enriched biomethane plant**

kg/h

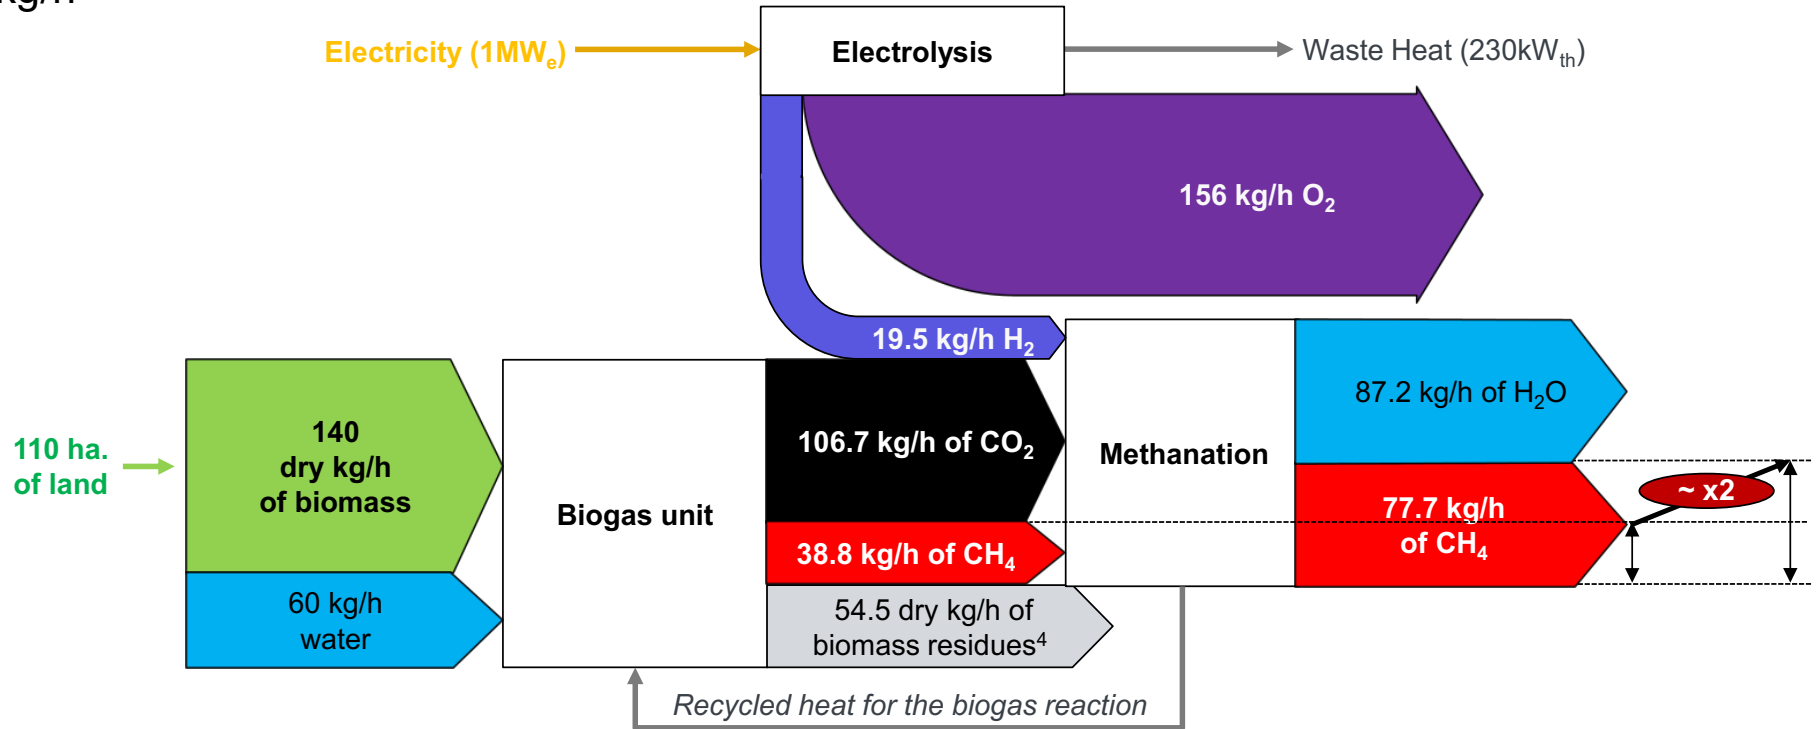

**Biomethane reactors produce raw biogas, with an excess of CO<sub>2</sub>, that can be upgraded with electrolytic hydrogen. In addition, the heat from methanation can be recycled to power the biogas unit, boosting the efficiency of biomethane production from 68.7% to 85.3%. This increases the ratio of methane output to biomass input by a factor of up to 2.5 and optimizes land use.**

1. feedstock is a maize silage of 5kWhch/kg of dry matter, cultivated with a land yield of 0.63MWch per km<sup>2</sup>.; 2The anaerobic digestion of maize silage requires heat and has an total efficiency of 68.7%; 3Thermochemical methanation at 300°C and 77.7% hydrogen-to-methane efficiency  
 Source: A.T. Kearney Energy Transition Institute analysis.

# There are two competing methanation processes: thermochemical catalysis and biological methanation

## Methanation methods compared<sup>4</sup>


	Thermochemical catalysis	Biological catalysis
<b>Comparative advantages Summary</b>	<ul style="list-style-type: none"> <li>• Technically more mature</li> <li>• Possibility of up-scaling: easier to control</li> <li>• Lower maintenance time</li> <li>• Higher temperature waste heat for recycling</li> </ul>	<ul style="list-style-type: none"> <li>• Potentially lower costs (no metal catalyst, lower pressure)</li> <li>• Tolerance to impurities in the feed gas</li> <li>• Flexibility in ramping rate and operational load</li> <li>• More adapted to small scale/decentralized (&lt;10MW)</li> </ul>
<b>Technical maturity</b>	<ul style="list-style-type: none"> <li>• Demonstration phase (6 MW being built by Etogas)</li> </ul>	<ul style="list-style-type: none"> <li>• Early demonstration phase (250 kW being built by Electrochaea)</li> </ul>
<b>Input gas</b>	any mix of CO <sub>2</sub> , H <sub>2</sub> , CO, CH <sub>4</sub> , H <sub>2</sub> O	
<b>Contamination tolerance</b>	<ul style="list-style-type: none"> <li>• Low tolerance to H<sub>2</sub>S and O<sub>2</sub></li> <li>• Requires dehydration of H<sub>2</sub> after electrolysis</li> </ul>	<ul style="list-style-type: none"> <li>• High tolerance to impurities, H<sub>2</sub>S, and water vapor.</li> <li>• Limited tolerance to oxygen</li> </ul>
<b>Temperature</b>	<ul style="list-style-type: none"> <li>• 250-400°C</li> </ul>	<ul style="list-style-type: none"> <li>• 60-70°C</li> </ul>
<b>Pressure</b>	<ul style="list-style-type: none"> <li>• 1-100 bar</li> </ul>	<ul style="list-style-type: none"> <li>• 1 bar</li> </ul>
<b>Methane purity (conversion yield<sup>1</sup>)</b>	<ul style="list-style-type: none"> <li>• 92-96% depending on catalyst and flow rate through the reactor</li> </ul>	<ul style="list-style-type: none"> <li>• ~98-99%</li> </ul>
<b>H<sub>2</sub>-to-methane energy efficiency<sup>2</sup></b>	77.7% theoretical limit without heat recovery	
<b>Power-to-methane energy efficiency<sup>2</sup></b>	<ul style="list-style-type: none"> <li>• ~60% excl. heat recovery; ~80% incl.</li> </ul>	<ul style="list-style-type: none"> <li>• Today: 54.7% excl. heat recovery; 73.5% incl.</li> <li>• Target: 63.2% excl. heat recovery; 82% incl.</li> </ul>
<b>Flexibility (0%-90% ramp up/down )</b>	<ul style="list-style-type: none"> <li>• 30 minutes to 1 hour in cold start</li> </ul>	<ul style="list-style-type: none"> <li>• Second to minutes</li> </ul>

**Thermochemical catalysis is likely to remain the preferred option in the short to mid-term. On the longer run, the biological method seems better adapted to small-scale applications, and the thermochemical method to mid- to large-scale ones.**

1. Conversion yield refers to the ratio of CO<sub>2</sub> molecules actually converted into CH<sub>4</sub> when enriched with H<sub>2</sub> in stoichiometric quantity; 2Energy efficiency in HHV, assuming free CO<sub>2</sub> supply.  
Source: A.T. Kearney Energy Transition Institute analysis; based on interviews with methanation technology developers Etogas and Electrochaea. Hydrogen-based energy conversion 32

A number of synthetic liquid fuels can also be synthesized from hydrogen and carbon

## Power-to-synfuels<sup>1</sup> pathways for H-C-O synfuels production

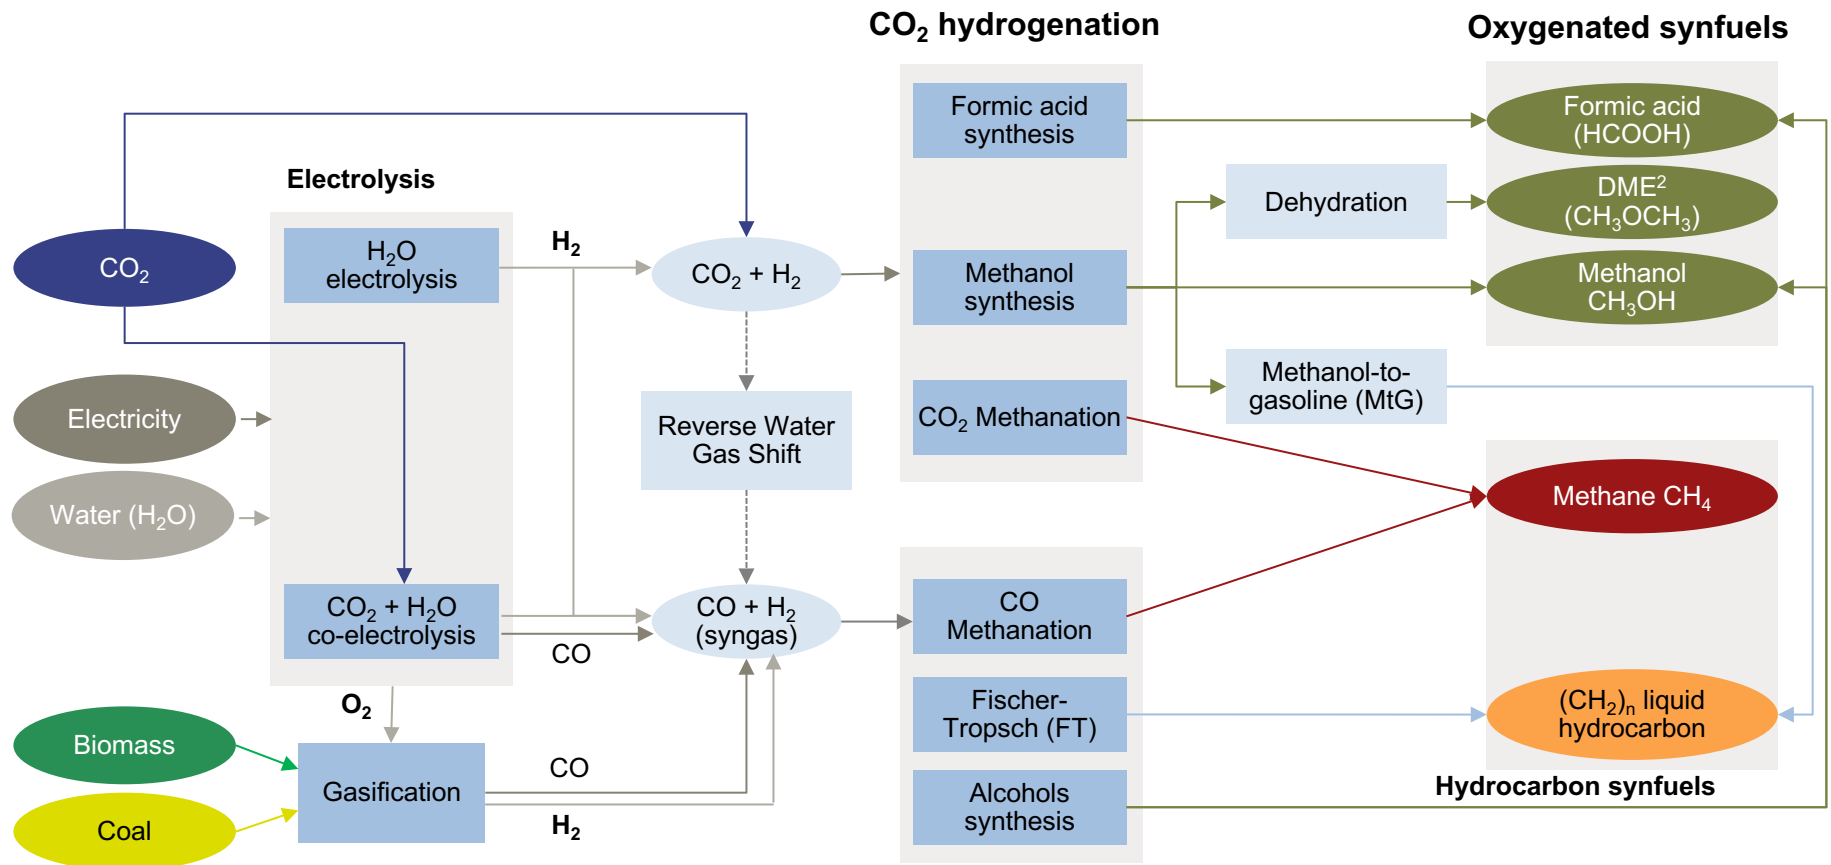

1. plant are synfuels plants where electricity and electrolyzers are used to produce hydrogen that will help to produce synfuels.

2. DME for Dimethyl ether.

Source: A.T. Kearney Energy Transition Institute analysis.

# Hydrogen is a vital molecule for mobility

## The role of hydrogen in mobility

Present

Future? 

### Fossil fuels



#### Diesel and gasoline

- Increase hydrogen / carbon [H/C] ratio of heavy oil fractions;
- Desulfurization (more stringent regulation).

#### Natural gas vehicles [NGV]

- Reduce local pollution and increase performance with hydrogen blending (hydrogen compressed natural gas fuel).

### Synthetic fuels



#### Biofuels

- Enrich biofuel plant with hydrogen to maximize biomass yield and thereby land use;

#### H-C-O synfuels

- Fix hydrogen with CO<sub>2</sub> to synthesize methane, methanol, dimethyl ether, gasoline...;

#### Ammonia fuels

- Fix hydrogen with nitrogen and use ammonia as a fuel.

### Pure Hydrogen fuel<sup>1</sup>



#### Pure hydrogen carrier

- Use hydrogen to produce electricity in fuel cell electric vehicles [FCEV];
- Use hydrogen fuel cell in battery electric vehicles [BEV] as a range extender.


**Mobility will probably be the main driver of hydrogen use in the medium-to-long term, but not necessarily for fuel cell electric vehicles.**

1. internal combustion engine [H2ICE] that uses a traditional ICE, modified to burn hydrogen instead of conventional gasoline, has lost momentum compared with FCEV and is not mentioned in this slide.

FCEVs are back in the spotlight, but successful deployment depends on the cost of fuel cells and on solving the challenge of the hydrogen infrastructure roll-out

## Basic circuits in a fuel-cell electric vehicle [FCEV]

Honda, FCX Clarity

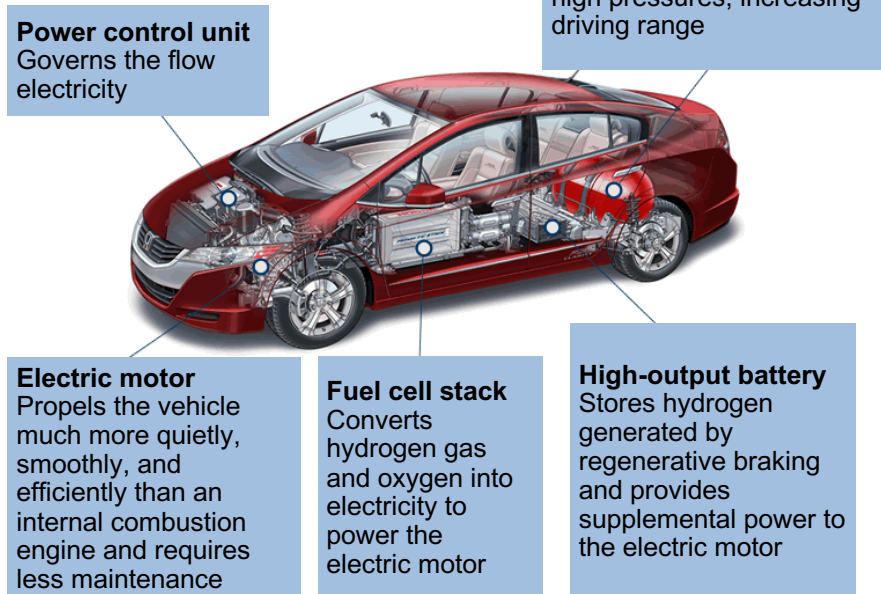

- Using fuel cells to power electric vehicles [FCEV] has long been considered a promising solution for mobility. FCEV would benefit from the advantages of electric drivetrains (namely high efficiency and no pollution at the point of use), while not incurring its drawbacks (refueling time, mileage range).
- However, FCEVs are still struggling to overcome the deployment “valley of death”. They must resolve three major challenges: onboard hydrogen storage, the durability and high costs of fuel cells, and hydrogen distribution.
- After years of stasis, FCEVs are back in the spotlight
  - Automakers have teamed up to renew the push towards hydrogen mobility. In 2013, Toyota and BMW; Daimler, Nissan and Ford; and General Motors and Honda announced partnerships;
  - Several public-private mobility programs have been announced to foster the deployment of hydrogen infrastructure (e.g. UKH<sub>2</sub>Mobility, H<sub>2</sub>USA) following the lead of existing, ambitious programs in South Korea, Japan and Germany.


**FCEV is a type of electric vehicles. But instead of storing electricity, a FCEV stores hydrogen and a fuel cell acts as a micro power plant to generate electricity on board.**

1. Fuel cells are also being developed as range extenders for electric vehicles (e.g. SymbioFCCell tests hydrogen fuel cell range extender on Renault Kangoo electric vans used by the French postal service).

# Hydrogen-enriched compressed natural gas vehicles may provide solutions to the hydrogen infrastructure development challenge, and to cleaner mobility

## Comparative performances of different blends

% of compressed natural gas vehicles [CNG] fuel performance

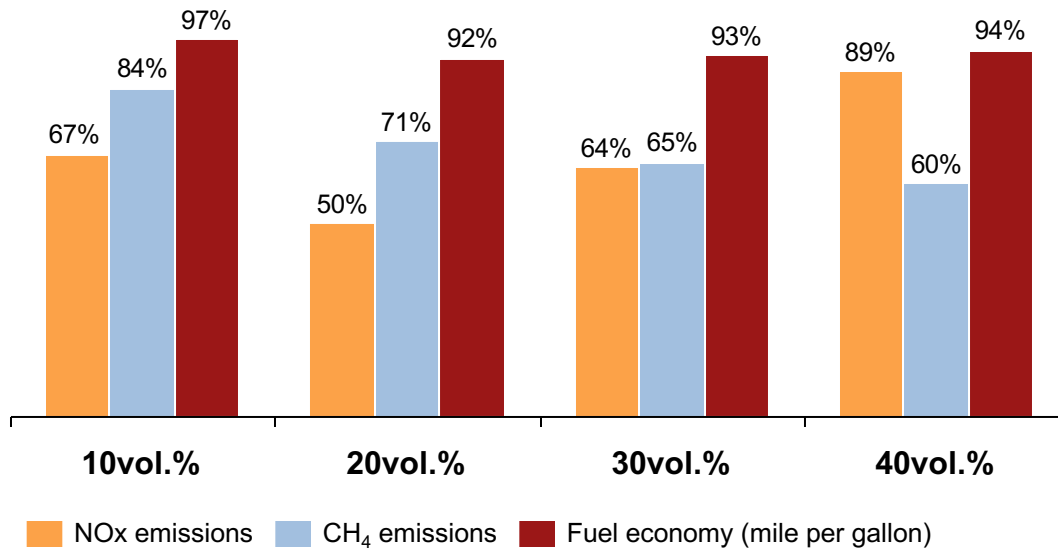

### How to read this graph?

- 20% blending results in a drop in NOx emissions of up to 50% compared with CNG.
- Fuel economy (km/L) is lower than for CNG when hydrogen is blended.
- Blending hydrogen with CNG significantly reduces the emissions of unburned CH<sub>4</sub>.


- Hydrogen can be used to upgrade natural gas for natural gas vehicles [NGVs]. It is believed that blending hydrogen with methane, and calibrating the engines to run on such a mixture, reduces air pollution and incurs a negligible loss of power performance (graph):
  - This is all the more important that NGVs have been introduced in several emerging countries to mitigate the effect of local air pollution on human health;
  - There are currently more than 15 million NGVs on the road, compared with around 100,000 battery electric vehicles [BEVs].
- Methanation is also a valuable option for decarbonizing gas-powered transport<sup>2</sup> and is being considered in several European countries, notably Germany or Sweden.
  - Audi has taken the lead with its e-gas project and a 6 MW demonstration plant in Werlte (Germany);
  - With the same wind power mix, e-gas vehicles would entail roughly similar well-to-wheel greenhouse gas [GHG] emissions than BEVs.

1. When running the motor at constant full load; 2For more information on methanation, please refer to slides 29 to 3  
Source: A.T. Kearney Energy Transition Institute analysis, based on 1Ma et al. (2010).

Hydrogen is an important industrial gas, with 87% of demand coming from the chemicals and petrochemicals industries

## Annual worldwide hydrogen consumption

2003 – 2016, million tons

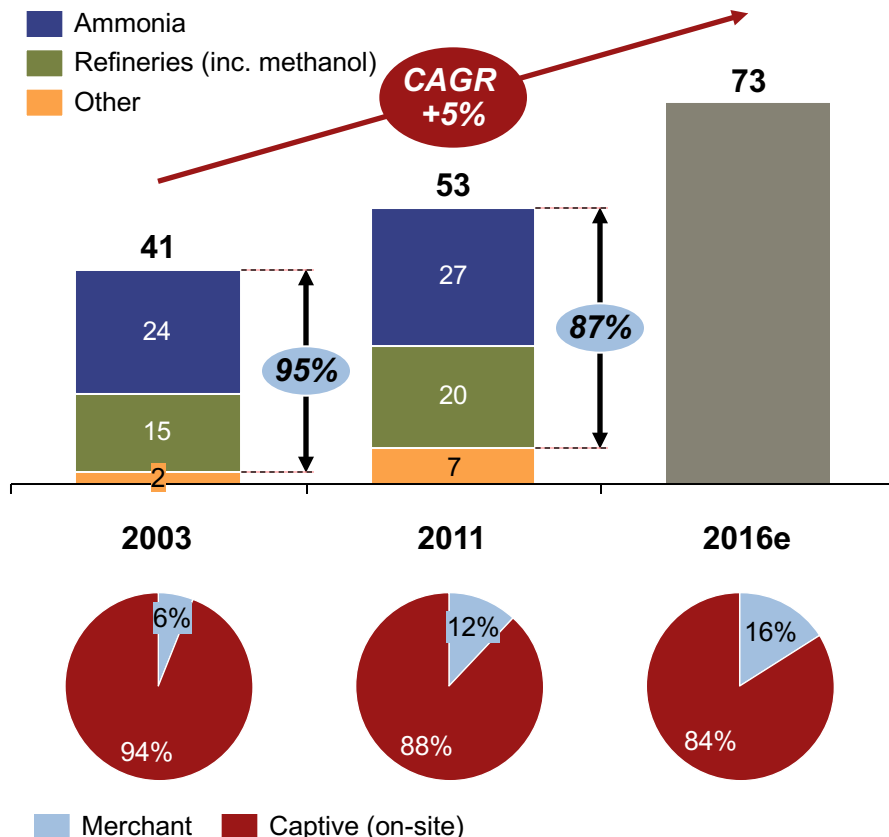


- Industry is the largest consumer of hydrogen and will remain so in the near- to mid-term. But industry is also one of the main producers of hydrogen, a by-product of several industrial processes.
- By-product hydrogen accounts for 33% and 36% of hydrogen production in Europe and the United States, respectively. On-purpose large scale captive facilities dominate with 65% and 49% of their production. This is to be compared with 9% and 15% for merchant H<sub>2</sub>.
- However, despite being distorted by “over-the-fence” sourcing by refineries, the share of merchant hydrogen has been steadily increasing on a global level – from 6% of consumption in 2003 to 12% in 2011. By 2016, it is expected to reach 16%.
- Small-scale applications, such as food factories and hospitals, may be the most attractive industrial markets in the short term due to the premium charged for very small quantities of high purity hydrogen.

1. A 5.6% CAGR has been applied on 2011 level assuming that 35% of the growth will derived from the merchant analysis.  
Source: A.T. Kearney Energy Transition Institute analysis, based on Global Industry Analysis (2012).

Electrolytic hydrogen is unlikely to compete with steam methane reforming, but may provide refineries close to H<sub>2</sub> equilibrium with additional operational flexibility

## Distribution of oil fractions and average H/C ratio<sup>1</sup>

% of weight of crude feed<sup>2</sup>

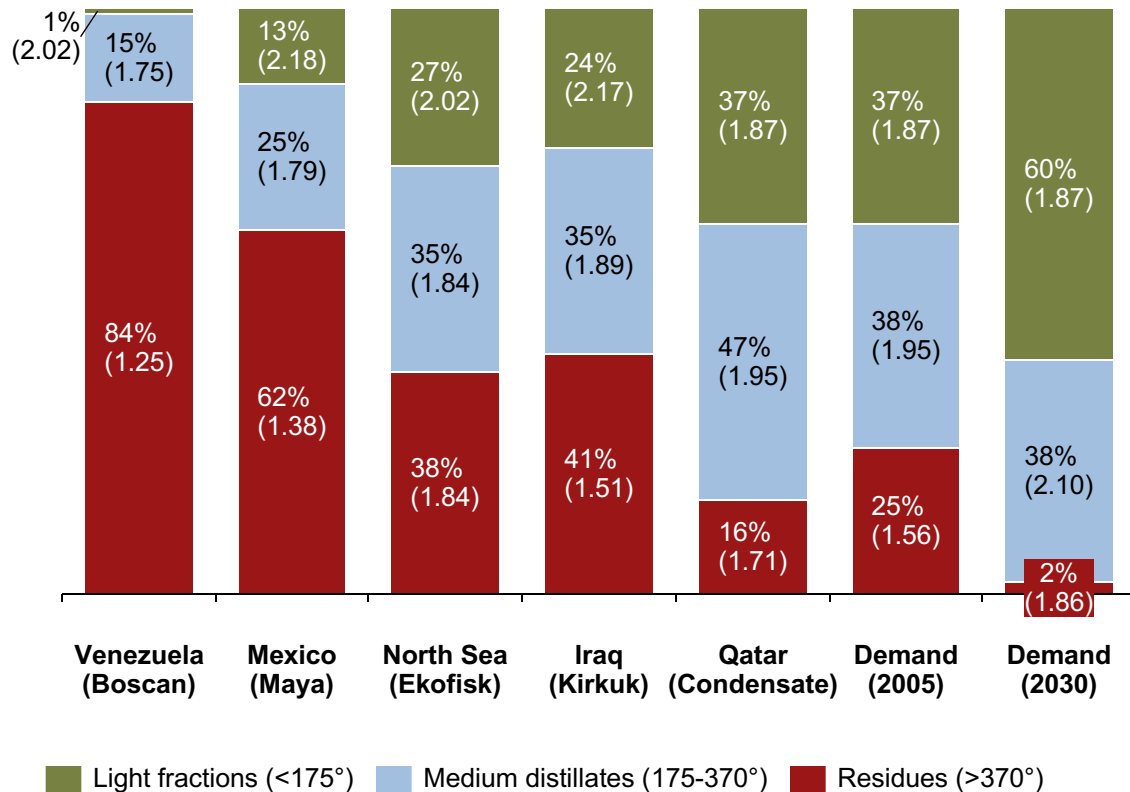


- Refineries produce H<sub>2</sub> as a by-product of catalytic reforming and consume H<sub>2</sub> to reduce the sulfur [SO<sub>x</sub>] content of oil fractions and to upgrade low-quality heavy oil.
- On a macro level, the H<sub>2</sub> balance of refineries has turned from positive to negative, a trend that is expected to continue because of: more stringent SO<sub>x</sub> regulations; the processing of heavier crudes; and falling demand for heavy end-products and growing demand for light products.
- Most of this deficit will be supplied by the reforming of natural gas. Electrolytic hydrogen is not yet able to compete with steam methane reforming, but it could provide operational flexibility for refineries that are close to hydrogen equilibrium.

1. hydrogen-to-carbon ratio; 2crude feed ranked by API index from extra heavy to condensate. API gravity is the scale developed by the American Petroleum Institute [API] to measure the relative density of petroleum liquids, in degrees.

Source: Institut Français du Pétrole Energies Nouvelles [IFPEN] (2012).

Small-scale ammonia production for fertilizers, coupled with distributed renewable production could make economic sense in remote locations

## Proton venture mini wind-to-hydrogen plant<sup>1</sup> COMPARED with sorfert steam methane reforming fertilizer plant<sup>2</sup>

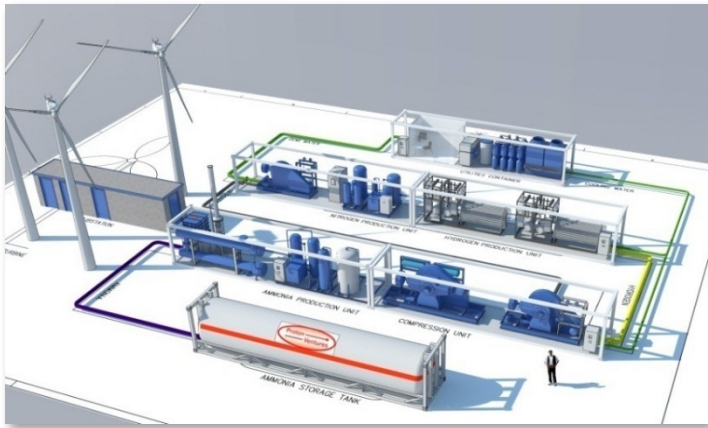

Proton Venture  
power-to-ammonia  
plant



Orascom /  
Sonatrach Sorfert  
steam methane  
reforming fertilizer  
plant

- More than half of H<sub>2</sub> produced worldwide is used to produce ammonia, obtained from the catalytic reaction of nitrogen and hydrogen. In this process, nitrogen is captured for free from the air, while the hydrogen needs to be produced.
- In practice, ammonia synthesis is usually coupled with H<sub>2</sub> production from steam methane reforming [SMR], in large integrated plants. Consequently, in contrast to refineries that can adjust their H<sub>2</sub> balance with external sourcing, ammonia plants are mainly a captive market.
- However, small-scale ammonia production for fertilizers, coupled with distributed renewable electricity production, could make economic sense in remote locations. In such places, the cost of transporting ammonia might make electrolytic H<sub>2</sub> competitive. Several projects have been considered, but none has yet been completed.

1. Sorfert is a greenfield fertilizer plant commissioned by Orascom in 2013 in Algeria. It is supplied in natural gas by Sonatrach (Sorfert is a joint-venture : 49% Sonatrach, 51% Orascom) and has a capacity of 2.200 t/d of ammonia and 3.400t/d of urea.

Source: A.T. Kearney Energy Transition Institute analysis, images courtesy of 1Proton Ventures, 2Orascom Construction Group.

### 3. Business cases



The main challenge for hydrogen conversion is economic rather than technical: how to find a sustainable business case in an uncertain environment?

## End-markets of electrolytic hydrogen




### Power-to-gas

- Injection into the gas network is, so far, limited to feasibility studies and field pilot plants (e.g. E.ON's 360 m<sup>3</sup>/h hydrogen injection in Falkenhagen). Hydrogen feedstock used for biogas and biofuel plants is also restricted to the up-scaling pilot plants in Germany (e.g. Etogas and the Audi 6 MW project in Werlte).



### Power-to-mobility

- Mobility applications are constrained by infrastructure in place, which consists, as of 2012, of 221 active refueling stations worldwide supplying around 650 demonstration fuel-cell-electric vehicles and 3,000 forklifts. There are also a small number of compressed natural gas stations equipped with hydrogen-blending facilities.



### Power-to-power

- Re-electrification, despite the promising increase in fuel-cell shipments, remains at a nascent stage and is still mainly driven by portable applications. Recent announcements from H<sub>2</sub> manufacturers indicate that the first integrated module may yet provide an outlet for off-grid power or grid support. At this stage, there is no long-term storage project in the pipeline.




### Power-to-industry

- The merchant hydrogen market supplying industrial needs (e.g. healthcare, space industry, meteorological monitoring) is growing and may generate higher prices in the short term for customers looking for high purity and small volumes of hydrogen. Coupling an electrolyzer with a wind farm or with solar PV cells close to end-demand may provide markets for the first stand-alone business cases.

- Most technologies in the hydrogen value-chain are proved, albeit at different stages of maturity. Cost reduction is the next prerequisite on the road to commercialization.
- Costs are only one side of the commercialization equation. They must be balanced by revenues to achieve profitability and there is a long way to go in this area too.
- Uncertainties over cost reductions and the shape of the market result in a complex business equation for hydrogen-based conversion and storage solutions.


The versatility of the hydrogen carriers opens the way to end-uses that valorize the power conversion to H<sub>2</sub> as a service or the H<sub>2</sub> produced as a feedstock

### Examples of direct revenue streams from the conversion of intermittent-source Electricity into hydrogen

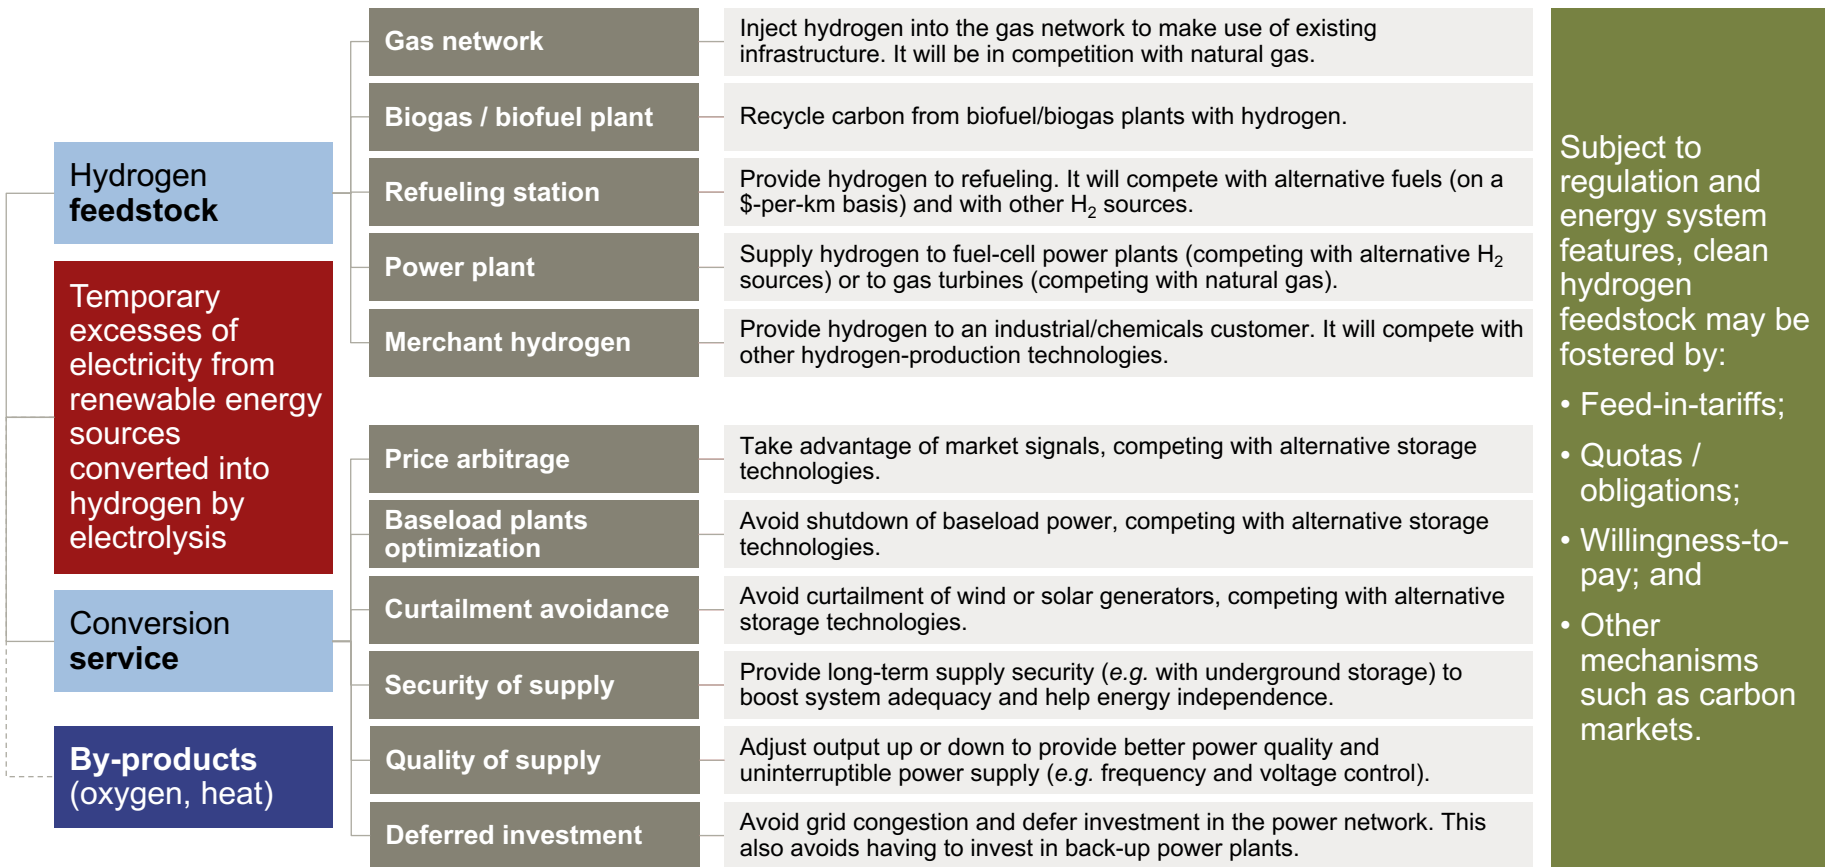

Applications that valorize H<sub>2</sub> as a feedstock and benefit from support mechanisms for low-carbon solutions are likely to drive the first hydrogen energy developments

**End-market prices for H<sub>2</sub> feedstock in Germany vs. natural gas adapted from E.ON<sup>1</sup> \$/MWh**

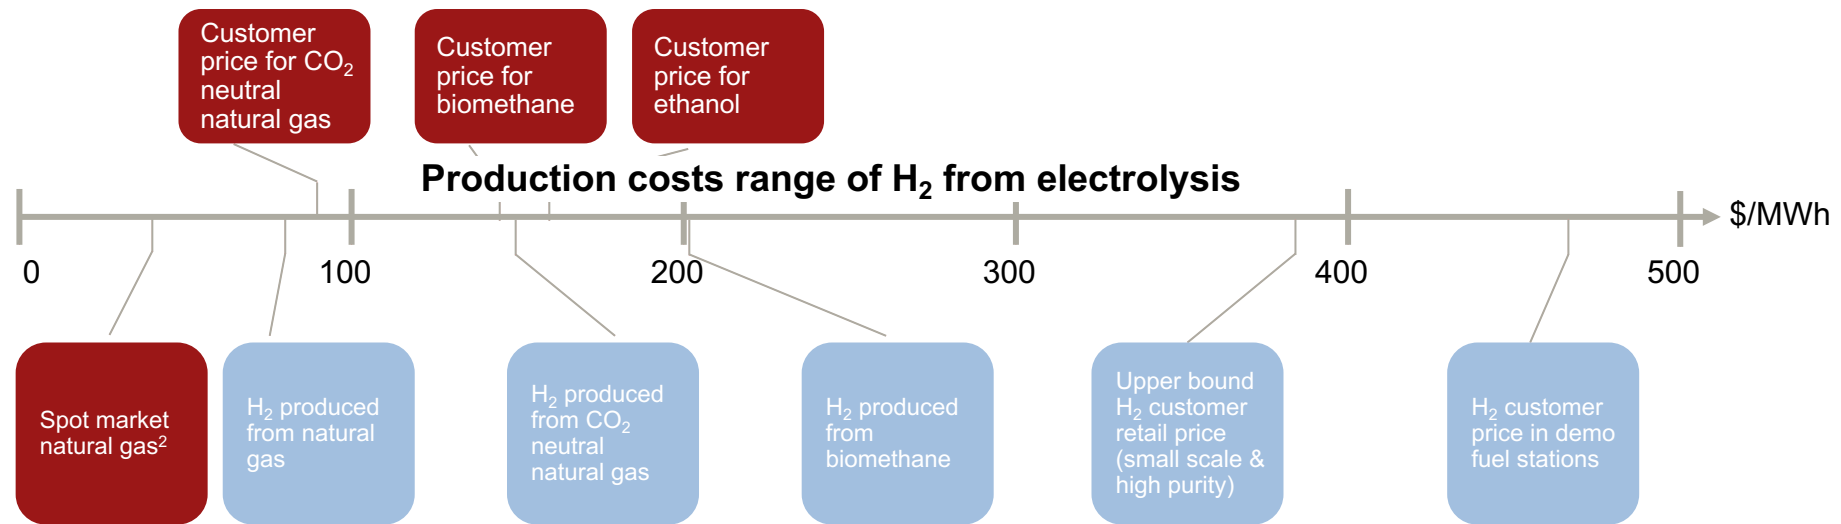


**The use of electrolytic hydrogen as a feedstock fits better in the current market structure and fetches higher end-market prices. However, bundling hydrogen production revenues with grid serviced using electrolyzers is expected to be a promising business model.**

1. Based on E.ON (2013) analysis presented by Dr. Kopp at the "H<sub>2</sub> in the economy" European Commission workshop. Prices have been converted from €/kWh to \$/MWh to improve ease of understanding of the report using a €/\$ conversion rate of 31; <sup>2</sup>Spot price on NetConnect Germany(NGC) market area.  
Source: E.ON (2013); Troncoso (2011).

## Remote areas and islands could act as testing grounds for the monetization of hydrogen services

### The role of the hydrogen energy carrier in the Ecoland Project, Isle of Wight (UK)

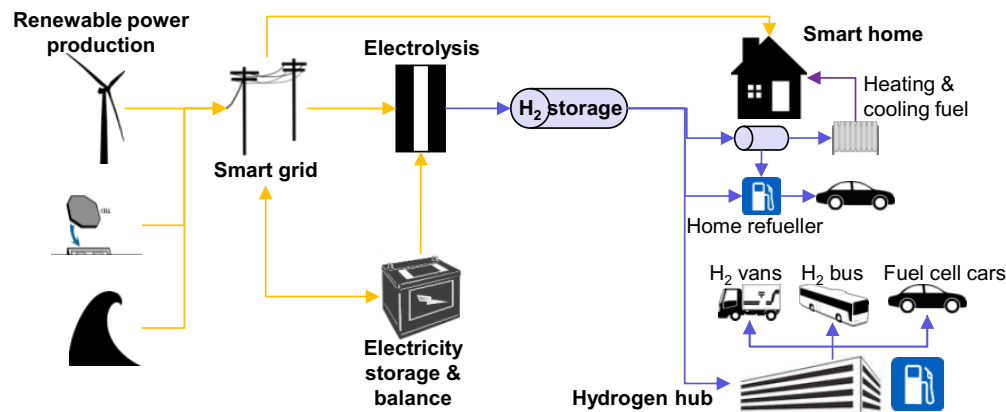


#### How to read this diagram?

- Ecoland aims to make the Isle of Wight fully renewable by 2020 and a net exporter to the UK mainland. Here, H<sub>2</sub> will be used as an energy storage medium and as a fuel for mobility. The UK Technology Strategy Board has awarded a \$7.5 million grant to build the infrastructure. In a second stage, temporary excesses of electricity produced from renewable energy sources could be exported to the UK by injecting it into the gas network.
- Electrolyzers will act as demand-side management, converting temporary excesses of electricity into hydrogen. Two refueling platforms will be installed with 350 bar and 700 bar capability (one of 3,939-4,923 MWh/day, one of 590 MWh/day).
- Project stakeholders include Toshiba for the energy management system and balance, IBM for smart appliances, ITM Power for hydrogen solutions and SSE for grid connections.

- Remote areas – *i.e.* communities not connected to central energy infrastructure - lead the way in using storage in conjunction with renewable energies.
- As highlighted by the IEA: “*Remote areas provide promising locations to evaluate the economics of high-penetration scenarios, potentially shedding insights for larger countries with ambitious renewable energy targets*”.
- In this paradigm, hydrogen solutions could be tested to absorb seasonal swing of supply and valorize temporary excesses of power outside the electricity sector for end-uses in mobility, heating and cooling, and even small-scale fertilizer production.

Hydrogen conversion solutions are made more complex because they involve many stakeholders

## Simplified stakeholder interactions in power-to-gas pathways in Germany

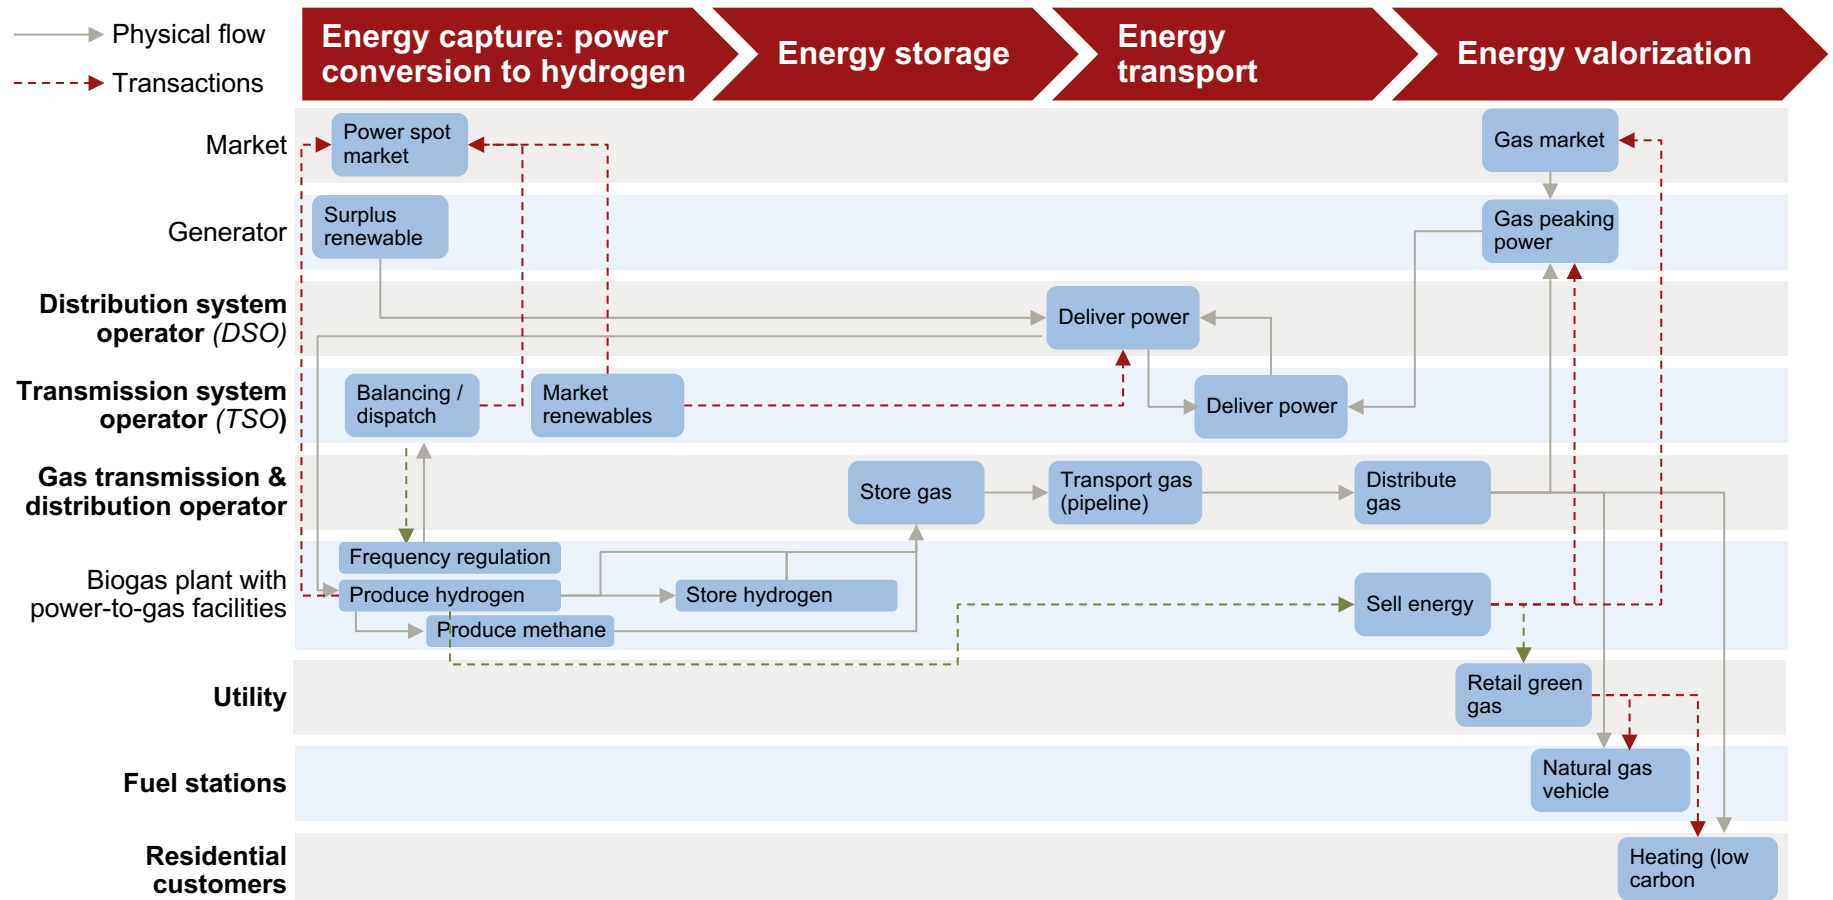


1. Feed-in-tariff compensation depends on all systems. In Germany, renewable electricity benefiting from priority dispatch is usually feed into the distribution network. It is then transmitted to TSO for sale on the spot market, where utilities purchase the electricity to send to end-consumers.

Source: A.T. Kearney Energy Transition Institute analysis, based on Hydrogenics (2012); Brandstätt et al. (2011).

Business models for conversion will require further R&D to develop optimization tools

## Illustration of energy system layout From single-source single-product to multiple-source multiple-product

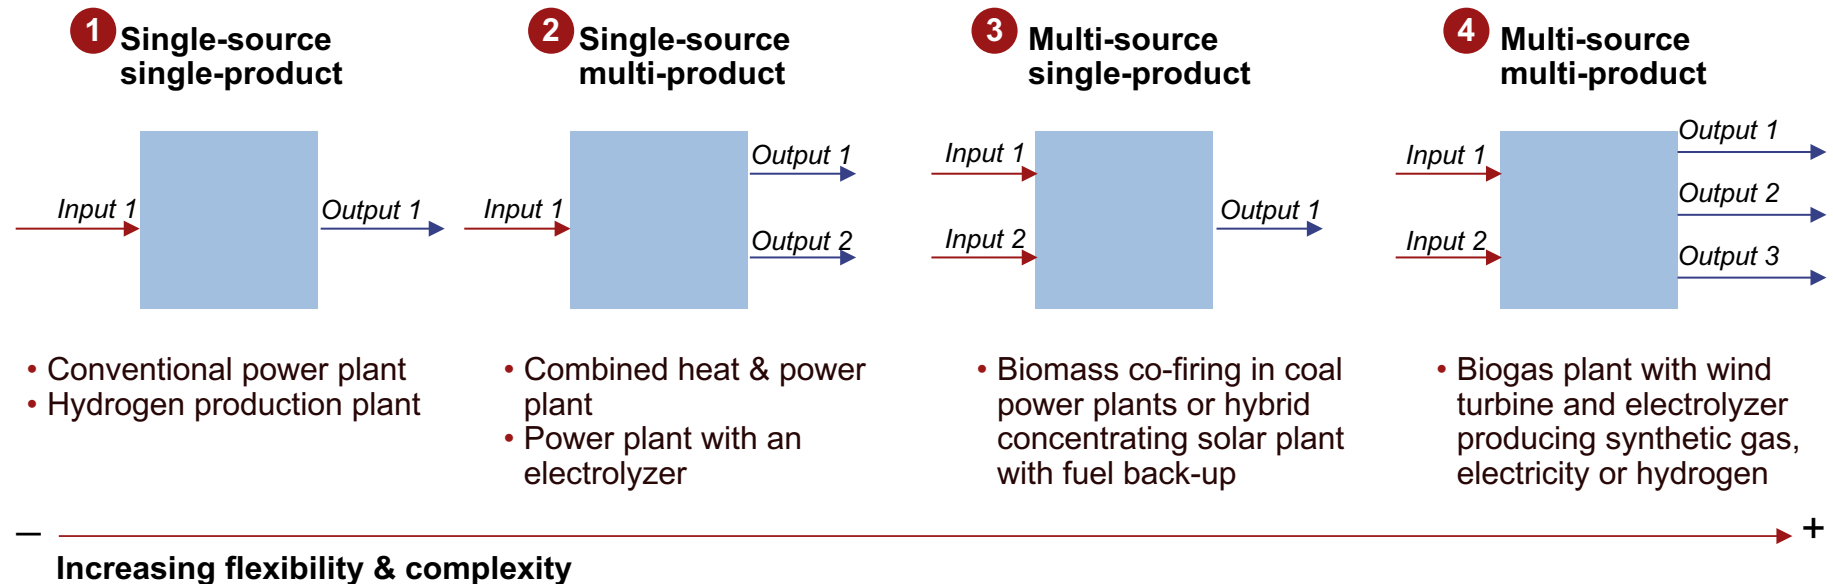

The versatility of the H<sub>2</sub> and its role as a bridge between power, heat, gas and liquid carriers open the way to multi-source multi-product energy systems. However, there is a serious lack of modeling tools for taking advantage of this new flexibility.

The business models of electrolytic hydrogen solutions are inherently system- and application-specific

## Power system and application factors influencing hydrogen business cases

### Power system-influencing factors

**Electricity prices**  
(including distribution)

**Renewable**  
(e.g. penetration, mix, pattern)

**Regulation**  
(e.g. reserve, low-carbon support...)

**Grid type**  
(island, continental...)

**Flexibility sources**  
(existing, potential)

**Power demand**  
(e.g. profile, distribution...)

**Hydrogen  
business  
case**

### Applications-influencing factors

**Consumption profile**  
(continuous/discontinuous)

**Location & accessibility**

**End-market prices**

**Green alternatives**

**Competitors**  
(Hydrogen, natural gas...)

**Regulation**

**Investors, policy-makers and decision-makers need to assess how appropriate hydrogen-based solutions are compared with the alternatives, in the context of local, application-specific conditions**

## 4. Environmental impact, safety & social acceptance



# The conversion of variable renewable electricity to hydrogen incurs few environmental challenges

## Summary of environmental impacts of hydrogen-based storage of intermittent Renewable electricity

### Air pollution



The conversion of variable renewable electricity to hydrogen incurs few environmental challenges. In general, hydrogen-storage solutions result in lower emissions than other energy-storage technologies, although their full lifecycle pollutants and GHGs emissions depend on the primary energy source and power-production technology.

### Land use



Land use is also very unlikely to be a constraint on hydrogen-based conversion solutions, although renewable-based systems could face problems because of their land requirements. Electrolyzing modules require a minimum surface area (typically around 75 m<sup>2</sup>/MW of H<sub>2</sub>, as low as 16.7 m<sup>2</sup>/MW for PEM). When hydrogen is used to enrich biofuel production by recycling excess of CO<sub>2</sub>, it is actually maximizing the land use of bioenergy

### Water requirements



The water requirement of electrolysis – water is used as a feedstock and for cooling – is an important factor to consider in an environmental-impact assessment of H<sub>2</sub> solutions, but is usually lower than for other low-carbon power generation technologies. Typically, around 250-560 liters of water are required per MWh of hydrogen produced. Cooling requirements are much higher, but can be avoided by using evaporation towers and closed-loop circuits.

# Handling hydrogen raises safety challenges that should not be underestimated

## Selective physical properties and risks in air Of hydrogen, methane and gasoline

Properties in air	Hydrogen	Gasoline vapor	Methane
Flammability limits	4 - 75%	1 - 7.8%	5.3 - 15%
Ignition energy (mJ)	0.02	0.24	0.29
Explosion limits	18 - 59%	1.1 - 3.3%	6.3 - 13.5%
Flame temperature (°C)	2'045	2'197	1'875

### How to read this table?

- H<sub>2</sub> is flammable over a wide range of concentrations and requires very low energy to ignite. But this energy requirement varies, depending on concentration: under 10%, ignition requires more energy, making it harder to ignite. Inversely, high concentrations, tending towards the stoichiometric<sup>4</sup> mixture, require increasingly low ignition energy.
- Auto-ignition is unusual in vessels containing pure H<sub>2</sub>. Hydrogen explosions are yet more severe than those of other fuels (although explosions of hydrocarbon fuels carry more energy).
- A hydrogen flame is as hot as a hydrocarbon flame, but emits less heat radiation, limiting the risk of secondary fires and reducing danger for the public and rescue workers. Hydrogen fires are vertical and localized, and the by-products of combustion are non-toxic.
- Finally, unlike most gases, which generally cool when they expand, H<sub>2</sub> compressed at ambient temperature heats up when it expands to atmospheric pressure. On its own, this is unlikely to lead to spontaneous ignition, but has to be borne in mind due to its possible combination with other effects

- Hydrogen raises safety issues because of its flammable and explosive nature. H<sub>2</sub> molecules are very small and light, allowing them to infiltrate materials and damage their internal structure<sup>1</sup>. This can lead to gas escaping and accumulating in confined spaces, creating risk of fire and explosion.
- The risks are relatively limited in open-air conditions, where hydrogen quickly rises and dilutes into a non-flammable concentration. But, in confined spaces, it may lead to high concentrations at the top of the installation, increasing the risk of explosion and fire.
- Hydrogen risks are particularly problematic because hydrogen leaks are difficult to detect. H<sub>2</sub> is colorless and odorless, and the addition of an odorant is not possible because of the gas's small molecular size.
- Sensors are therefore crucial in preventing incidents. Although they exist and are used in industry, the technologies are very bulky and expensive, and cannot reliably distinguish between hydrogen and methane molecules.

1. Hydrogen can also react with some geological formations suitable for underground storage of other gases.

Source: A.T. Kearney Energy Transition Institute analysis, based on Health and Safety Laboratory (2008); Bennaceur et al. (2005).

# International collaboration is essential for the development of harmonized regulation, codes and standards and to foster social acceptance

## Steps to a socially accepted technology system

**Development of regulation, codes & standard [RCS]**


International collaboration is essential for the development of harmonized regulation, codes and standards to govern hydrogen-storage solutions:

- Hydrogen has a history of safe use in the chemicals and petrochemicals industries, where it is handled by trained personnel in a similar way to other fuels;
- Small end-users, meanwhile, are subject to very stringent regulatory framework that may be over-protective.

Passing from limited use by trained workforces to public use will require a delicate balancing of existing regulations.

**Social acceptance**

The use of hydrogen as an energy carrier is relatively new and, as such, may be vulnerable to inaccurate public perception. Social acceptance is vital to the successful deployment of any technology. It can be achieved by heightening awareness of the risks and benefits offered by hydrogen technologies, through: education, providing information on safety and emphasizing the advantages of hydrogen.

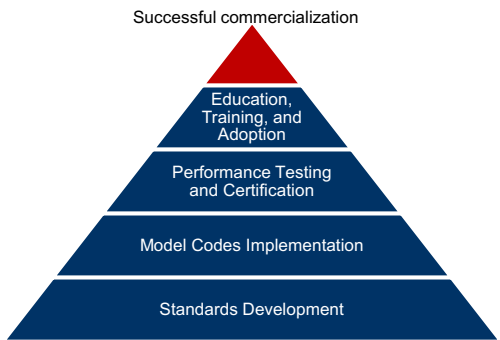


## 5. Outlooks



The value of hydrogen-based energy solutions lies predominantly in their ability to convert renewable power into green chemical energy carriers

## Illustrative role of electrolytic hydrogen as a bridge between electron and Molecular-based energy

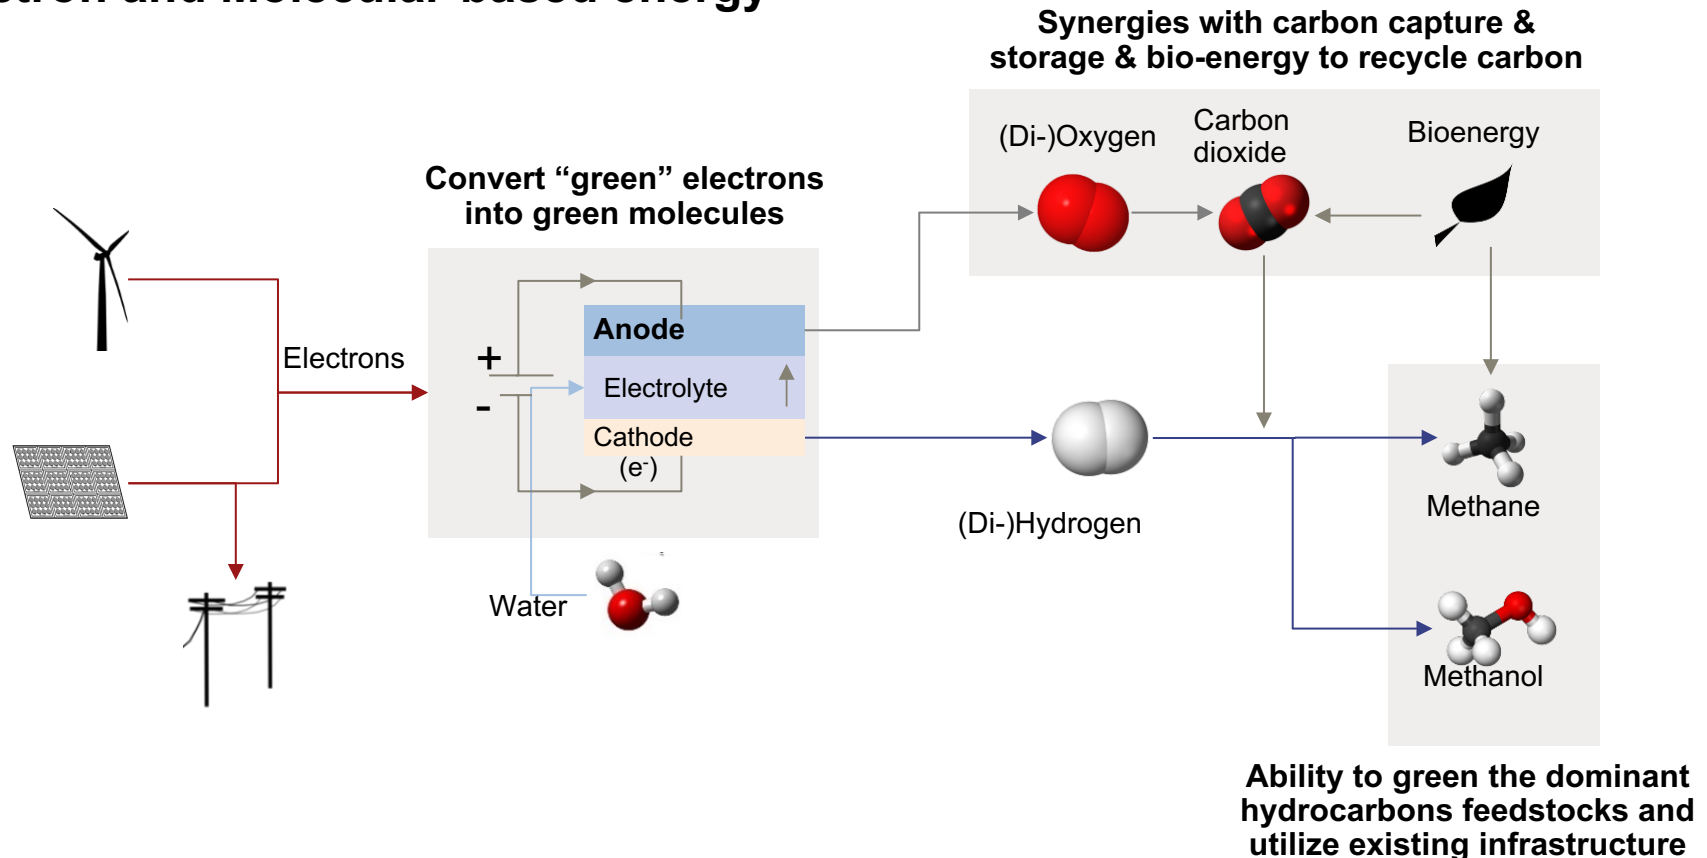

There is no silver bullet for hydrogen-based storage solutions: end-use requirements must be matched with the features of individual energy systems

**Simplified matrix of key energy-system factors, organized by hydrogen-solutions**

Illustrative only


		Power-to-hydrogen	Power-to-hydrogen	Power-to-gas	Power-to-power	Power-to-power
		Centralized	Decentralized	Centralized	Centralized	Decentralized
Energy mix	Variable renewable penetration rate	High impact	Low impact	High impact	High impact	Low impact
	Domestic gas resources	Low impact	Low impact	Medium impact	Low impact	Low impact
	Biogas and biofuel deployment	Low impact	Low impact	High impact	Low impact	Low impact
Infrastructure	Power grid congestions	Low impact	Low impact	Low impact	Medium impact	Low impact
	Gas network (pipeline & storage)	Low impact	Low impact	High impact	Low impact	Low impact
	Natural gas refueling stations	Low impact	Low impact	High impact	Low impact	Low impact
	Hydrogen refueling stations	High impact	High impact	Low impact	Low impact	Low impact
	Geological salt formation	High impact	High impact	High impact	High impact	High impact
Regulation	FIT for green gas, chemicals.	High impact	High impact	High impact	Low impact	Low impact
	Renewable Energy Certificates	High impact	High impact	High impact	Low impact	Low impact
	Incentives for fast regulations	Medium impact	Low impact	Medium impact	High impact	Low impact
	Presence of a balancing market	Medium impact	Low impact	Medium impact	High impact	Low impact
	Other options for ancillary services	Low impact	Low impact	Low impact	High impact	Low impact
Energy demand	Power peak/off-peak ratio	Medium impact	Medium impact	Medium impact	High impact	Low impact
	Residual load	Medium impact	Medium impact	Medium impact	High impact	Low impact
	Merchant H <sub>2</sub> demand	High impact	Medium impact	Low impact	Low impact	Low impact
	FCEV and SNG demand	High impact	High impact	High impact	Low impact	Low impact

Ranking is illustrative only

Low impact High impact


In all cases, the deployment of hydrogen systems requires cost reductions and public support

### Illustrative roadmap for hydrogen-based energy storage solutions in Europe

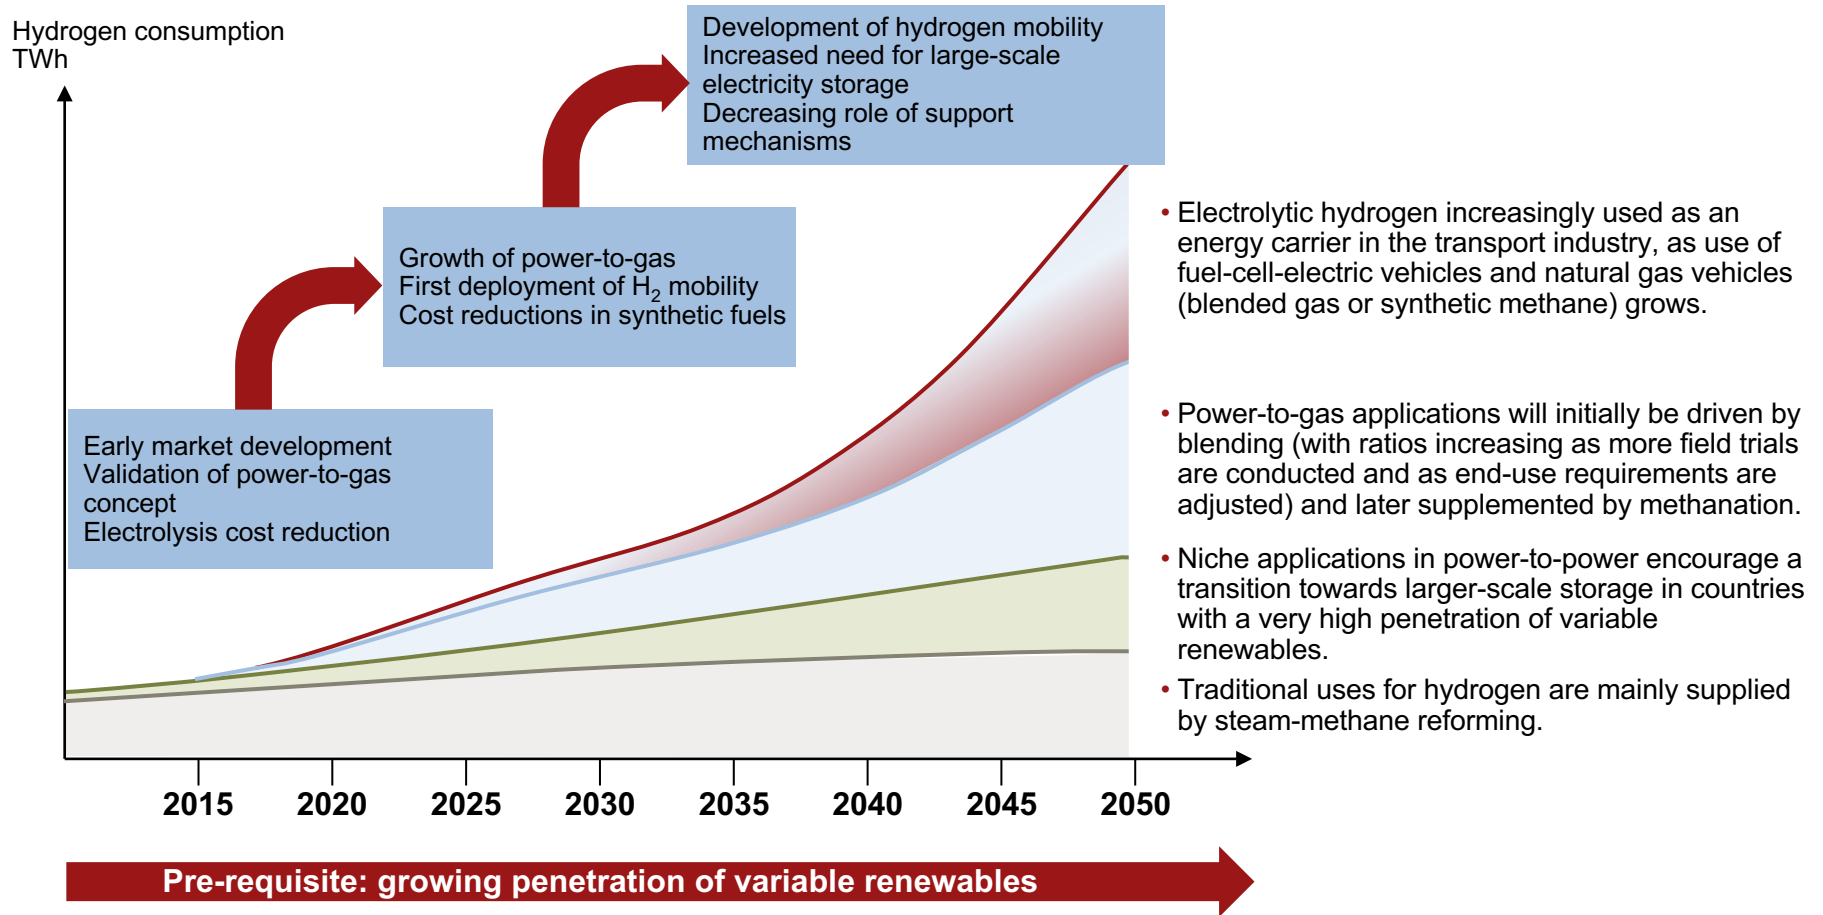

Many individual, hydrogen-related technologies are technologically mature, but electrolysis and power-to-gas are in the “valley of death”

### Commercial maturity curve of integrated hydrogen projects

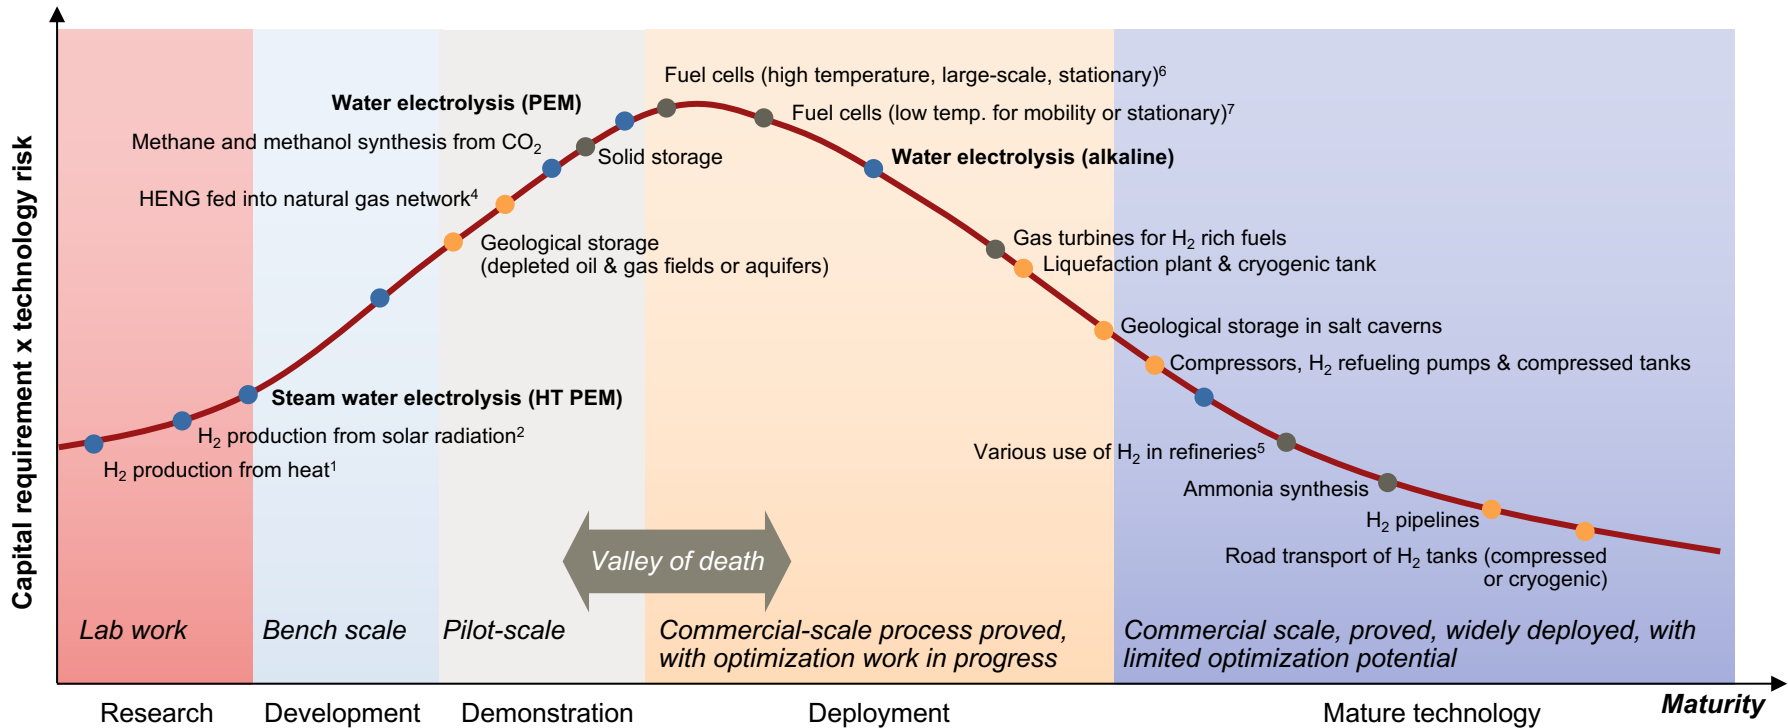

Legend


- Hydrogen conversion
- Hydrogen handling
- Hydrogen production

1. Nuclear or solar thermochemical water splitting; 2Photolysis, photo-electrolysis or photo-biological water-splitting; 3By thermochemical processes, principally: methane reforming, the cracking of petroleum fractions, and coal or biomass gasification; 4HENG: Hydrogen-enriched natural gas; 5Includes the upgrading of heavy/sour oil and the synthesis of syngas from syngas (methanol, DME, MtG etc); 6Includes SOFC, PAFC and MCFC; 7Includes PEMFC and AFC.

Source: A.T. Kearney Energy Transition Institute analysis.

# Hydrogen-based energy-storage projects are still a way from commercial deployment

## Commercial maturity curve of integrated hydrogen projects

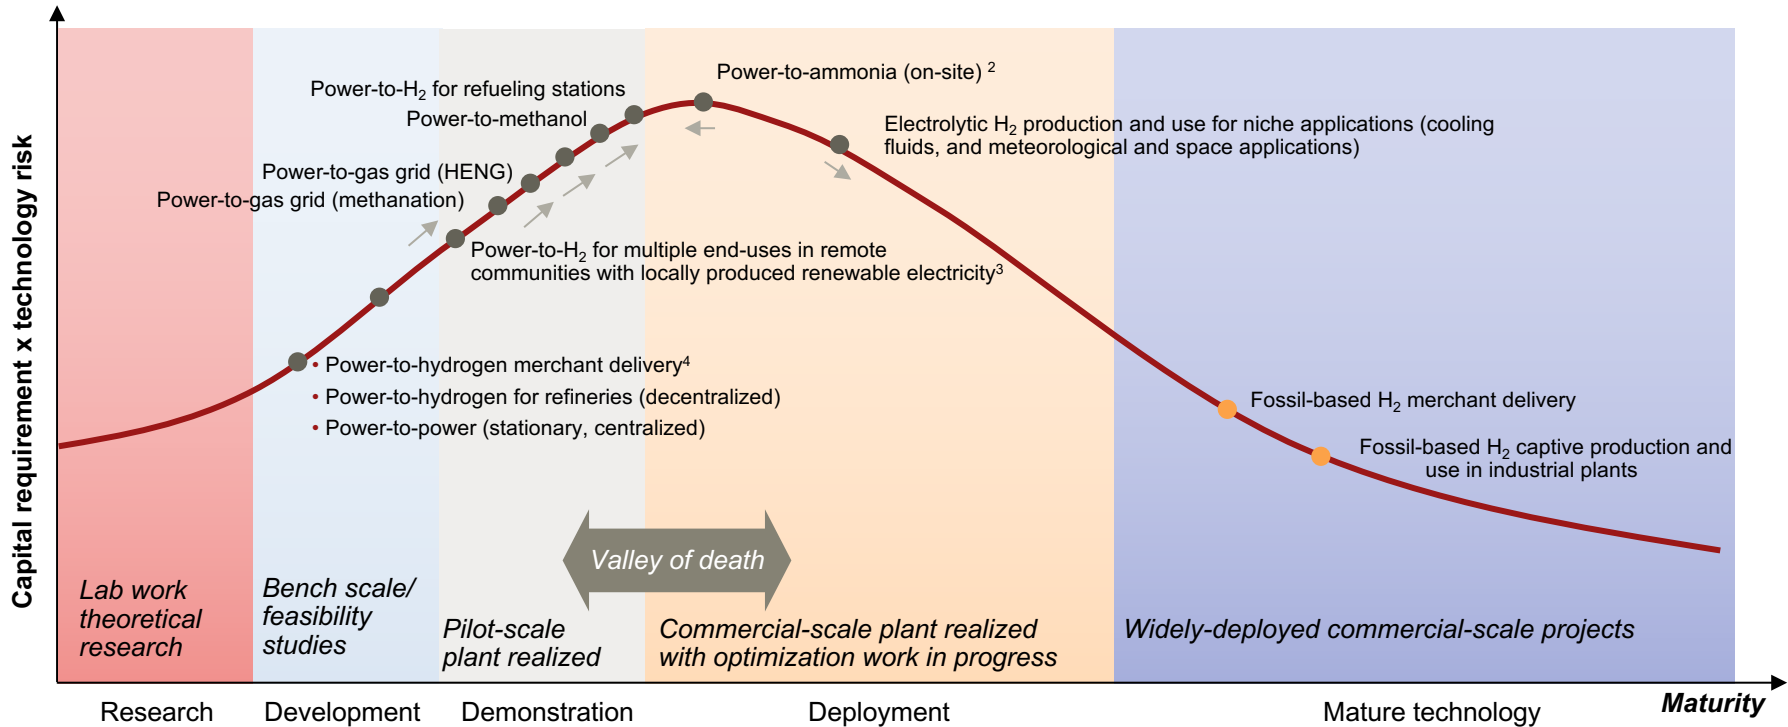

### Legend


- Integrated electrolytic hydrogen projects
- Integrated fossil-based hydrogen projects

1. The ranking is an estimate, based on the number of plants installed and their total capacity; in the case of the R,D&D stage, it is based on the size of the largest demonstration project relative to that of a commercial-scale plant. The grey arrows illustrate the dynamics of these projects over time; 2Only three plants are still in operation, and are being replaced by coal or methane-based hydrogen; 3Niche applications require electrolytic hydrogen for its purity.

Source: A.T. Kearney Energy Transition Institute analysis.

Public authorities have a wide variety of temporary incentives at their disposal to help transform hydrogen-based solutions into self-sustaining commercial activities

## Illustration of incentives and Regulation, codes & standard development options

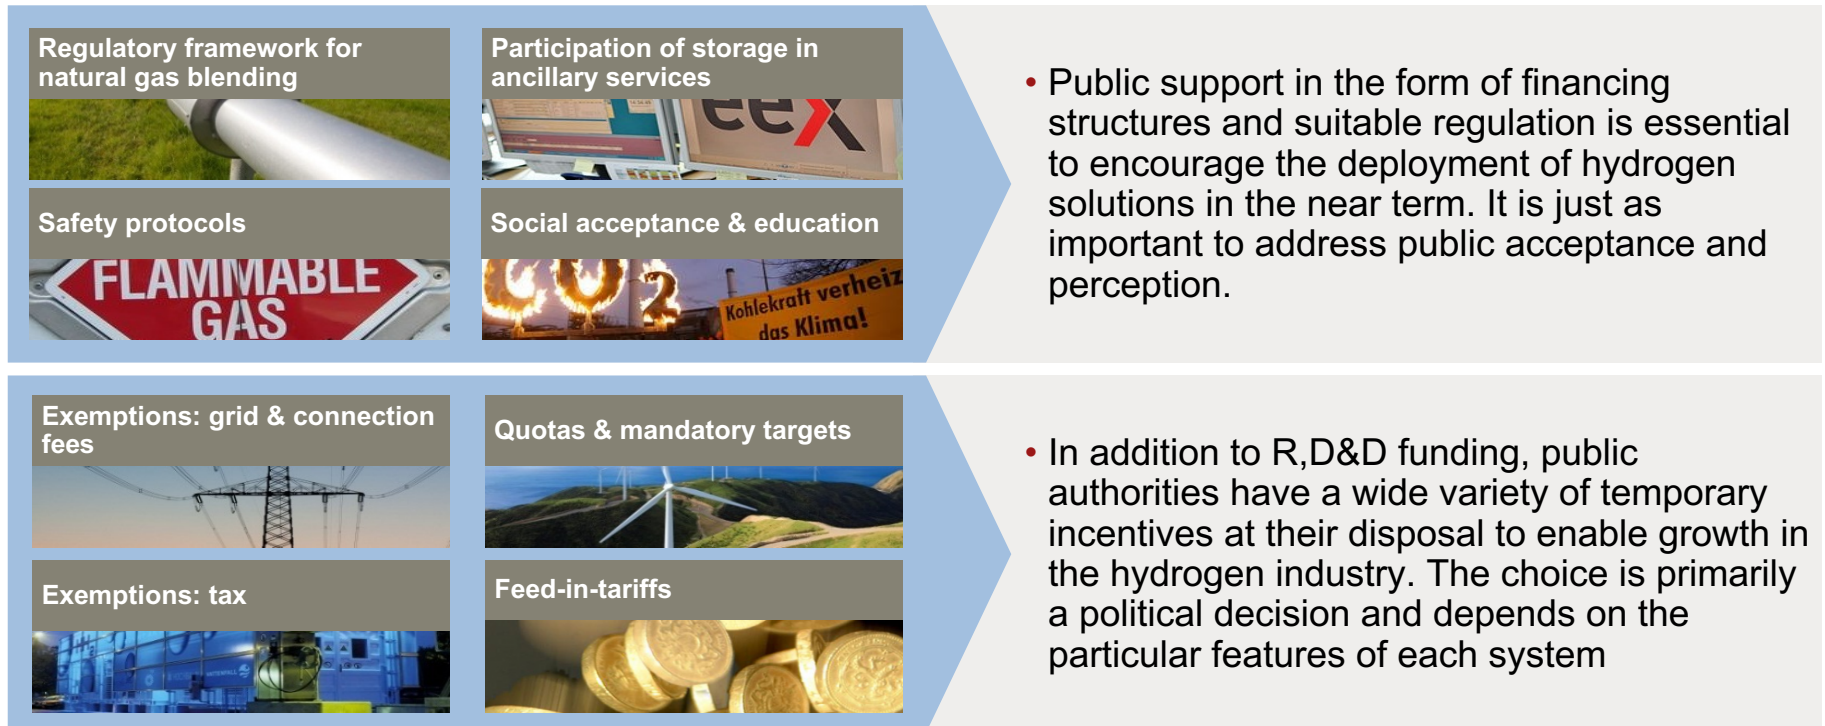

**For hydrogen-based solutions to be successful, renewable-energy certificates must be integrated across all energy sectors: traceability and proof of origination are crucial.**

## Appendix & bibliography



# Acronyms (1/2)

<b>AC/DC</b>	Alternating/Direct current	<b>GHG</b>	Greenhouse gas
<b>AFC</b>	Alkaline fuel cell	<b>H2ICE</b>	Hydrogen internal-combustion-engine vehicle
<b>API</b>	American Petroleum Institute	<b>H/C</b>	Hydrogen-to-carbon ratio
<b>BM</b>	Balancing market	<b>HCNG</b>	Hydrogen compressed natural gas
<b>BoP</b>	Balance of plant	<b>HENG</b>	Hydrogen enriched natural gas
<b>BTU</b>	British thermal unit	<b>H-Gas</b>	High calorific gas
<b>BEV</b>	Battery electric vehicle	<b>HHV</b>	Higher heating value
<b>CAES</b>	Compressed air energy storage	<b>HT</b>	High temperature
<b>CAGR</b>	Compound annual growth rate	<b>ICE</b>	Internal combustion engine
<b>CAPEX</b>	Capital expenditure	<b>IEA</b>	International Energy Agency
<b>CCS</b>	Carbon capture & storage	<b>IFPEN</b>	Institut Français du Pétrole et Energies Nouvelles
<b>CHP</b>	Combined heat and power	<b>IRENA</b>	International Renewable Energy Agency
<b>CNG</b>	Compressed natural gas	<b>IRR</b>	Internal rate of return
<b>DENA</b>	German Energy Agency	<b>K</b>	Kelvin (unit of measurement for temperature)
<b>DH</b>	District heating	<b>LCA</b>	Life cycle analysis
<b>DME</b>	Dimethyl ether	<b>LCOE</b>	Levelized cost of electricity
<b>DS</b>	Degree scenario	<b>LCOH</b>	Levelized cost of hydrogen
<b>DSO</b>	Distribution system operator	<b>LDV</b>	Light duty vehicle
<b>EEX</b>	European Energy Exchange	<b>L-Gas</b>	Low calorific gas
<b>EPEX</b>	European Power Exchange	<b>LHV</b>	Lower heating value
<b>FC</b>	Fuel cell		
<b>FCEV</b>	Fuel cell electric vehicle		
<b>FCHJU</b>	Fuel Cell and Hydrogen Joint Undertaking		
<b>FIT</b>	Feed-in tariff		

## Acronyms (2/2)

<b>LOHC</b>	Liquid organic hydrogen carrier	<b>SMES</b>	Super-conducting magnetic energy storage
<b>MCFC</b>	Molten carbonate fuel cell	<b>SMR</b>	Steam methane reforming
<b>MtG</b>	Methanol-to-gas	<b>SNG</b>	Synthetic natural gas
<b>NG</b>	Natural gas	<b>SOEC</b>	Solid oxide electrolyzer cell
<b>NPV</b>	Net present value	<b>SOFC</b>	Solid oxide fuel cell
<b>NREL</b>	National Renewable Energy Laboratory	<b>T&amp;P</b>	Temperature and pressure
<b>O&amp;G</b>	Oil and gas	<b>T&amp;D</b>	Transmission and distribution
<b>O&amp;M</b>	Operation and maintenance	<b>TCM</b>	Thermo-chemical material
<b>OPEX</b>	Operating expenditure	<b>TEPS</b>	Total primary energy supply
<b>Pa</b>	Pascal (Unit of measurement for pressure)	<b>TSO</b>	Transmission system operator
<b>P2G</b>	Power-to-gas	<b>URFC</b>	Unitized regenerative fuel cell
<b>P2S</b>	Power-to-synfuel	<b>US DoE</b>	United States Department of Energy
<b>PAFC</b>	Phosphoric acid fuel cell	<b>VRB</b>	Vanadium redox batteries
<b>PCM</b>	Phase change material		
<b>PEM</b>	Proton exchange membrane		
<b>PES</b>	Primary energy source		
<b>PHS</b>	Pumped-hydro Storage		
<b>PV</b>	Solar photovoltaic		
<b>R&amp;D</b>	Research and development		
<b>RCS</b>	Regulations, codes and standard		
<b>RE</b>	Renewables		
<b>REC</b>	Renewable energy certificate		
<b>RES</b>	Renewable electricity source		
<b>RMFC</b>	Reformed-methanol fuel cell		

## Picture credits

- Slide 4:** Wind turbines from the West Wind Project, New Zealand, Siemens
- Slide 15:** 2 MW electrolysis plant from E.ON's Falkenhagen power-to-gas pilot plant (H<sub>2</sub> injection into the local gas grid), Germany, Hydrogenics
- Slide 16:** Rjukan 150 MW electrolysis plant, Norway, NEL Hydrogen
- Slide 24,59:** San Jose 500 kW fuel cells eBay installation, US, Bloom Energy
- Slide 24:** Fusina 16 MW Hydrogen pilot power plant, Italy, Enel
- Slide 26,41:** Mobile tower powered by solar photovoltaic cells, India, Vihaan Network Limited
- Slide 34:** Bizkaia Energia 755 MW combined cycle gas turbine, Spain, ESB International
- Slide 34:** A3 Sportback G-tron e-gas vehicle as part of the methanation project in Werlte, Germany, Audi
- Slide 34:** Hydrogen storage & refueling facility in Whistler, Canada, Air Liquide
- Slide 35:** Basic circuits in a fuel cell electric vehicle: FCX Clarity, United States, American Honda Motor
- Slide 39:** Sorfert steam methane reforming fertilizer plant (2,200 t/d ammonia and 3,400 t/d urea), Algeria, Orascom Construction Group
- Slide 39:** NFuel mini wind-to-hydrogen plant design, The Netherlands, Proton Ventures
- Slide 40:** Hybrid power plant including 500 kW electrolyzer, Germany, Enertrag
- Slide 41:** Power-to-gas 250 kW Alpha Plant, Germany, ZSW / Etogas
- Slide 41:** CUTE hydrogen station to refuel fuel cell buses in Hamburg, Germany, Vattenfall
- Slide 41:** Hydrogen storage tank, Linde
- Slide 58:** The Earth as seen from space
- Slide 52:** MYRTE energy-storage platform including a 560 kWc solar field, and integrated hydrogen module, France, Areva

## Bibliography (1/5)

- 50 Hertz Data – Download from Website: Archive Wind Power (<http://www.50hertz.com/en/1983.htm>) and Archive Photovoltaics (<http://www.50hertz.com/en/PV.htm>)
- Andrew (2011), “Re-envisioning the role of hydrogen in a sustainable energy economy”, Andrew Reed
- Argonne (2011), “Liquid hydrogen production and delivery from a dedicated wind power plant”, Amgad Elgowainy, Marianne Mintz, Darlene Steward, Olga Sozinova, Daryl Brown, Monterey Gardiner
- Ayers et al. (2010), “Research advances towards low cost, high efficiency PEM electrolysis”, Kathy Ayers, Everett Anderson, Christopher Capuano
- Ball et al. (2009), “The Hydrogen Economy – Opportunities and Challenges”, Michael Ball, Martin Wietschel, Cambridge University Press
- Bennaceur et al. (2005), “Hydrogen: A Future Energy Carrier?”, Kamel Bennaceur, Brian Clark, Franklin M. Orr Jr, T.S. Ramakrishnan, Claude Roulet, Ellen Stout, Oilfield Review pp. 30-41
- Blechinger et al. (2012), “Energy storage systems for renewable island systems – an enormous global market potential”, Philipp Blechinger, Enrico Howe, Catherina Cader, Guido Plessmann, Markus Hlusiak, Robert Seguin, Christian Breyer, Reiner Lemoine Institute, Proceedings of International Renewable Energy Storage (IRES) Conference 2012 in Berlin
- Bossel (2006), “Does a hydrogen economy make sense?”, Ulf, Bossel, Proceeding of the Institute of Electrical and Electronics Engineers Vol. 94, pp. 1826-1837
- Businesscar (2013), “Carmakers join forces to develop fuel-cell technology”, <http://www.businesscar.co.uk>
- Cerri et al. (2012), “Scientific assessment in support of the materials roadmap”, Isota Cerri, Florence Lefebvre-Joud, Peter Holtappels
- ChemSystems– (2012), “Ammonia and Urea Strategic Business Analysis”, [http://www.chemsystems.com/reports/search/docs/toc/SBA09\\_Ammonia\\_Urea\\_TOC.pdf](http://www.chemsystems.com/reports/search/docs/toc/SBA09_Ammonia_Urea_TOC.pdf)
- Clausen et al. (2010), “Technoeconomic analysis of a methanol plant based on gasification of biomass and electrolysis of water”, Lasse R. Clausen, Niels Houbak, Brian Elmegaard, Energy 35, pp. 2338-2347
- Crotogino et al. (2010), “Large-Scale Hydrogen Underground Storage for Securing Future Energy Supplies”, Fritz Crotogino, Sabine Donadei, Ulrich Bünger, Hubert Landinger, proceedings of the 18th World Hydrogen Energy Conference
- Daimler AG (2013), “Progress on FCEV development and conditions for FCEV market introduction”, Dr. Jörg Wind, Presentation for the EC event H2 in the economy
- Denholm et al (2004), “Life cycle energy requirements and greenhouse gas emissions from large scale energy storage systems”, Paul Denholm, Gerald Kulcinski, Energy Conversion and Management, vol. 45, pp. 2153–2172
- Derwent (2006), “Global environmental impacts of the hydrogen economy”, Richard Derwent, International Journal of Nuclear Hydrogen Production and Application, vol. 1
- Deutscher Verein des Gas-und Wasserfaches – DVGW (2013), “DVGW-Forschungsprojekt Energiespeichkonzepte”, Thorsten Brümmer, presentation at European Commission workshop H2 in the economy.
- Dincer et al. (2012), “Comparative life cycle assessment of hydrogen and other selected fuels”, Ibrahim Dincer, Kevork Hacatoglu, Marc A. Rosen, Faculty of Engineering and Applied Science, University of Ontario Institute of Technology, International Journal of Hydrogen Energy, vol. 37
- European Institute for Energy Research – EIFER (2011), “Role of electrolysis and regenerative syngas and synfuel production”, Qingxi Fu

## Bibliography (2/5)

- E.ON (2013), "H2 in the economy - The strongest link in the energy chain?", European Commission Workshop Proceedings, [http://ec.europa.eu/energy/technology/events/20130426\\_h2\\_in\\_the\\_economy\\_en.htm](http://ec.europa.eu/energy/technology/events/20130426_h2_in_the_economy_en.htm)
- Electric Power Research Institute – EPRI (2010), "Electricity Energy Storage Technology Options - A White Paper Primer on Applications, Costs, and Benefits"
- Energy Efficiency and Renewable Energy – EERE (2007), "Fuel cell technologies office multi-year research, development and demonstration plan", The Fuel Cell Technologies Office
- Energy research Centre of the Netherlands – ECN (2009), "PEM Fuel Cells Durability and Cost", Frank de Bruijn, Presentation for the Hydrogen and Fuel Cells in the Nordic Countries conference
- Etogas (2012), "Meeting A.T. Kearney Energy Transition Institute – Etogas"
- European Commission - Directorate-General for Research (2006), "Introducing hydrogen as an energy carrier: safety, regulatory and public acceptance issues"
- European Hydrogen & Fuel Cell Technology Platform (2005), "Current status & action plan for implementing hydrogen regulations, codes & standards in the EU"
- European Power Exchange – EPEX (2012), Spot Intraday Trading index price dataset
- Federation of Indian Chambers of Commerce and Industry – FICCI and A.T. Kearney (2012), "Green telecom: the way ahead industry inputs for the proposed national telecom policy"
- Forschungsverbund Erneuerbare Energien Energiekonzept – FVEE(2010), "Eine Vision für ein nachhaltiges Energiekonzept auf Basis von Energieeffizienz und 100% erneuerbaren Energien"
- Fraunhofer Institut für Windenergie und Energiesystemtechnik für Umwelt Bundes Amt (2010), "2050: 100% - Energie Ziel 2050: 100% Strom aus erneuerbaren Quellen"
- FuelCellToday (2012), "The Fuel Cell Industry Review 2012"
- FuelCellToday (2013), "Water electrolysis & Renewable Energy Systems"
- Gahleitner (2012), "Hydrogen from renewable electricity: An international review of power-to-gas pilot plants for stationary applications", Gerda Gahleitner, International Journal of Hydrogen Energy, Vo. 38, pp. 2039-2061
- GE (2010), "Syngas Turbine Technology", <http://www.ge-energy.com/content/multimedia/files/downloads/Syngas%20Turbine%20Technology.pdf>
- German Aerospace Center – DLR (2010) "Langfristszenarien und strategien für den ausbau der erneuerbaren energien in Deutschland bei berücksichtigung der entwicklung in europa und global"
- Germany Trade & Invest – GTAI, website: <http://www.gtai.de/GTAI/Navigation/EN/Invest/Industries/Smarter-business/Smart-mobility/national-hydrogen-and-fuel-cell-technology-innovation-programme.html>
- Giner (2012), "PEM Electrolyzer Incorporating an Advanced Low Cost Membrane"
- Global Industry Analysis – GIA (2012), "Hydrogen Production and Storage Technologies – a global strategic business report"

## Bibliography (3/5)

- Gonzales et al. (2011), "Process comparison of biomass-to-liquid (BtL) routes Fischer-Tropsch synthesis and methanol to gasoline", Maria Iglesias Gonzalez, Régis Edzang, Georg Schaub, Karlsruhe Institute of Technology
- Graves et al. (2010), "Sustainable hydrocarbon fuels by recycling CO<sub>2</sub> and H<sub>2</sub>O with renewable nuclear energy", Christopher Graves, Sune D. Ebbesen, Mogens Mogensen, Klaus S. Lackner, Renewable and Sustainable Energy Reviews 15, pp. 1-23
- GrDF (2012), "L'injection de biométhane dans le réseau de gaz naturel", Claire Brecq, presentation for the 10th Conférence sur le biogaz et le biométhane
- Greene (2013), "Worldwide Status of Hydrogen Fuel Cell Vehicle Technology and Prospects for Commercialization", David Greene, Oak Ridge National Laboratory
- GRT Gaz (2010), "Etude de la capacité des infrastructures gazières à répondre aux besoins des centrales prévues"
- Hawkins (2006), "Technological characterization of hydrogen storage and distribution technologies", Sam Hawkins
- He et al (2012), "Evaluation indicators for energy –chemical systems with multi-feed and multi-product", Chang He, Xiao Feng, Energy, vol. 43, pp. 344-354
- He et al. (2005), "PEM Fuel Cell Catalysts: Cost, Performance, and Durability", Chunzhi He, Sanket Desai, Garth Brown, Srinivas Bollepalli, the Electrochemical Society Hydrogen Bus Alliance
- Health and Safety Laboratory (2008), "Spontaneous ignition of hydrogen – Literature Review"
- Hemmes et al. (2007), "Towards multi-source multi-products energy systems", Kas Hemmes, Leslie Zachariah-Wolff, Martin Geidl, Göran Andersson, International Journal of Hydrogen Energy, vol. 32, pp. 1332-1338
- Hydrogenics (2012), "Power-to-gas: technology and business model progress", Proceedings of the IPHE Conference in November 16th Sevilla Workshop
- IHS (2012), "Global Methanol Market Review"
- Institut Français du Pétrole et Energies Nouvelles – IFPEN (2012), "L'hydrogène, carburant de l'après pétrole?"
- Institute of Energy Economics and the Rationale Use of Energy – IER (2013), "The system effects and electricity market impacts of the Energiewende policy in Germany"
- International Energy Agency – IEA (2011a), "Harnessing Variable Renewables - A guide to balancing challenge"
- International Energy Agency – IEA (2011b), "Deploying Renewables 2011 – Best and Future Policy Practice"
- International Energy Agency – IEA (2012a), "Energy Technology Perspectives 2012"
- International Energy Agency – IEA (2012b), "World Energy Outlook 2012"
- International Energy Agency – Renewable Energy Technology Deployment – IEA-RETD (2012), "Renewable energies for remote areas and islands (REMOTE)"
- International Partnership for Hydrogen and Fuel Cells in the Economy – IPHE (2011), "Renewable Hydrogen report - Utsira wind power and hydrogen plant", [http://www.iphe.net/docs/Renew\\_H2\\_Ustira.pdf](http://www.iphe.net/docs/Renew_H2_Ustira.pdf)
- International Renewable Energy Agency – IRENA (2012), "Electricity storage and renewables for island power – a guide for decision makers"
- Jørgensen et al. (2008), "Production price of hydrogen from grid connected electrolysis in a power market with high wind penetration", Claus Jørgensen, Stephanie Ropenus

## Bibliography (4/5)

- Ma et al. (2010), “Hydrogen-Enriched Compressed Natural Gas as a Fuel for Engines”, Fanhua Ma, Nashay Naeve, Mingyue Wang, Long Jiang, Renzhe Chen and Shuli Zhao, Tsinghua University
- Mansilla et al. (2012), “Electric system management through hydrogen production – A market driven approach in the french context”, Christine Mansilla, Jeremy Louyrette, Sandrine Albou, Cyril Bourasseau, Nathalie Collignon, Séverine Dautremont, Julien Martin, Françoise Thais, International Journal of Hydrogen Energy, vol. 37, pp. 10986-10991
- Mansilla et al. (2013), “Economic competitiveness of off-peak hydrogen production today – A European comparison”, Christine Mansilla, Jeremy Louyrette, Sandrine Albou, Cyril Bourasseau, Séverine Dautremont, Energy (2013), <http://dx.doi.org/10.1016/j.energy.2013.03.022>
- McPhy Energy, <http://www.mcphy.com/>
- Melaina et al. (2013), “Blending hydrogen into natural gas pipeline networks: A review of key issues”, Marc Melaina, Olga Antonia, Michael Penev, National Renewable Energy Laboratory [NREL]
- Mielke et al. (2010), “Water consumption of energy resource extraction, processing, and conversion”, Erik Mielke, Laura Diaz Anadon, Venkatesh Narayanamurti, Energy Technology Innovation Policy Research Group, Harvard Kennedy School
- Mohseni et al. (2012), “The competitiveness of synthetic natural gas as a propellant in the Swedish fuel market”, Farzad Mohseni, Martin Görling, Per Alvfors, Royal Institute of Technology
- National Renewable Energy Laboratory – NREL (2010), “1–10 kW Stationary Combined Heat and Power Systems Status and Technical Potential”
- National Renewable Energy Laboratory – NREL (2012), “Fuel Cell Buses in U.S. Transit Fleets: Current Status 2012”
- NaturalHy (2009), “Using the natural gas network”
- New Energy World Industry Grouping – NEW IG (2011), “Fuel Cell and Hydrogen technologies in Europe: financial and technology outlook on the European sector ambition 2014 – 2020”
- Nordpool (2011), Elspot prices dataset, <http://www.nordpoolspot.com/>
- Olateju et al. (2011), “Hydrogen production from wind energy in Western Canada for upgrading bitumen from oil sands”, Babatunde Olateju, Amit Kumar, Energy 36, pp. 6326-6339
- Potashcorp – (2012), “2011 online review”, [http://www.potashcorp.com/industry\\_overview/2011/nutrients/40/](http://www.potashcorp.com/industry_overview/2011/nutrients/40/)
- Pöyri – (2009), “Impact of intermittency: how wind variability could change the shape of the British and Irish electricity markets”
- Proton Ventures BV – (2012), “NFuel: Mini Ammonia Units”
- Pureenergycenter (2012), “Promoting Unst Renewable Energy (PURE) project - From wind to green fuel”, <http://www.pureenergycentre.com/pureenergycentre/Pureprojectcasesstudy.pdf>
- Raj et al. (2012), “Standalone PV-diesel system vs. PV-H2 system: an economic analysis”, Arun S. Raj, Prakash C. Ghosh, Energy 42, pp. 270-280
- Roads2HyCom (2008), “Large hydrogen underground storage”

## Bibliography (5/5)

- Siemens (2010), "Advanced hydrogen turbine development", Joseph Fadok, presentation at UTSR workshop
- Siemens (2013), "H2 in the economy - The strongest link in the energy chain?", European Commission Workshop Proceedings, [http://ec.europa.eu/energy/technology/events/20130426\\_h2\\_in\\_the\\_economy\\_en.html](http://ec.europa.eu/energy/technology/events/20130426_h2_in_the_economy_en.html)
- Sørensen (2008), "Underground hydrogen storage in geological formation and comparison with other storage solutions", Bent Sørensen, Roskilde University
- Sterner (2009), "Bioenergy and renewable power methane in integrated 100% renewable energy systems", Michael Sterner, Kassel University Press
- Steward et al. (2009), "Lifecycle cost analysis of hydrogen versus other storage options", National Renewable Energy Laboratory
- Technical University of Denmark – DTU (2012), "Solid Oxide Electrolysis Cells", Sune D Ebbesen, Presentation at the symposium Water electrolysis and hydrogen as part of the future Renewable Energy System
- Timmons (2010), "Natural Gas fuel effects on emissions and fuel economy", Suzanne Timmons, Southern California Gas Company
- Troncoso et al. (2011), "Electrolysers for mitigating wind curtailment and producing 'green' merchant hydrogen", Enrique Troncoso, Marcus Newborough, International Journal of Hydrogen Energy, vol. 36, pp. 120-134
- Tromp et al. (2003), "Potential environmental impact of a hydrogen economy on the stratosphere", Tracey Tromp, Run-Lie Shia, Mark Allen, John Eiler, Y.L. Yung, Science, New Series, vol. 300, pp. 1740-1742
- Umweltbundesamtes – UBA (2010), "Energieziel 2050: 100% Strom aus erneuerbaren Quellen Umweltbundesamt", Thomas Klaus, Carla Vollmer, Kathrin Werner, Henry Lehmann, Klaus Müschen
- United States Department of Energy – US DoE (2009), "Targets for Onboard Hydrogen Storage Systems for Light-Duty Vehicles"
- United States Department of Energy – US DoE (2011), "Energy Storage Program Planning Document"
- United States Department of Energy – US DoE (2012), "Mass-Production Cost Estimation for Automotive Fuel Cell Systems"
- United States Department of Energy – US DoE, The Hydrogen Analysis (H2A) Project, Hydrogen and Fuel Cell Program, [http://www.hydrogen.energy.gov/h2a\\_analysis.html#h2a\\_project](http://www.hydrogen.energy.gov/h2a_analysis.html#h2a_project)
- United States Energy Information Administration – EIA (2008), "The Impact of Increased Use of Hydrogen on Petroleum Consumption and Carbon Dioxide Emissions"
- Wallner et al. (2007), "The effects of blending hydrogen with methane on engine operation, efficiency, and emissions", Thomas Wallner, Henry K. Ng, Robert W. Peters, Technical Papers presented at SAE World Congress & Exhibition
- Webber (2007), "The water intensity of the transitional hydrogen economy", Michael E Webber, Environmental Research Letters, vol. 2
- Zentrum für Sonnenenergie- und Wasserstoff-Forschung – ZSW (2012), "Technik und Ziele der 250 kWel -Power-to-Gas-Forschungsanlage"

The A.T. Kearney Energy Transition Institute is a nonprofit organization. It provides leading insights on global trends in energy transition, technologies, and strategic implications for private sector businesses and public sector institutions. The Institute is dedicated to combining objective technological insights with economical perspectives to define the consequences and opportunities for decision makers in a rapidly changing energy landscape. The independence of the Institute fosters unbiased primary insights and the ability to co-create new ideas with interested sponsors and relevant stakeholders.

For further information about the A.T. Kearney Energy Transition Institute and possible ways of collaboration, please visit [www.energy-transition-institute.com](http://www.energy-transition-institute.com), or contact us at [contact@energy-transition-institute.com](mailto:contact@energy-transition-institute.com).

Permission is hereby granted to reproduce and distribute copies of this work for personal or nonprofit educational purposes. Any copy or extract has to refer to the copyright of the A.T. Kearney Energy Transition Institute.